

## 4G Solar-powered Traffic Sensing Camera

| Picture                                                                          | Model                | Resolution       | Lens               | Field of View            | Optimal Capture Distance | Capture Range | Capture Speed Maximum | IP&IK Rating | Listino € | Features                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
|----------------------------------------------------------------------------------|----------------------|------------------|--------------------|--------------------------|--------------------------|---------------|-----------------------|--------------|-----------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|  | SC211-EU<br>(1/2.8") | 2MP<br>1920*1080 | Fixed Lens<br>16mm | H19.4°<br>D22.2°<br>V11° | 15m~20m                  | 10m~25m       | 70km/h                | IP66         | € 3251,00 | <ul style="list-style-type: none"> <li>* Support 4G LTE; Nano SIM: SD card, up to 256G; MQTT&amp;HTTP Protocol</li> <li>* Adjustable Pole Mount Bracket, Anti-theft Mounting Design</li> <li>* Solar-powered supported</li> <li>* 7.2V, 6400mAh, 46.08Wh battery and USB Type-C Power Supply</li> <li>* Built-in High-accuracy GPS Module</li> <li>* Radar Trigger Technology and Intelligent Algorithm Confirmation</li> <li>* Vehicle Capture, Quick Start Capture</li> <li>* Low-power operation mode and working mode switch automatically</li> <li>* Equipped with WiFi for web GUI configuration</li> <li>* Operational Temperature: -20℃ ~60℃</li> <li>* IR Wave Length: 850nm (Default)</li> </ul> <p>Optional:</p> <ul style="list-style-type: none"> <li>* 6mm lens optional (Entrance &amp; Exit/Turning Recommended) Capture Range: 3~15m</li> <li>Capture Speed Maximum: 30km/h</li> <li>* IR Wave Length: 740nm</li> </ul> |

## Solar-powered Series

| Picture                                                                            | Model                               | Resolution                 | Lens                    | Field of View                                                | IR Distance | IR Wave Length | Capture Speed Maximum | IP&IK Rating | Listino € | Features                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
|------------------------------------------------------------------------------------|-------------------------------------|----------------------------|-------------------------|--------------------------------------------------------------|-------------|----------------|-----------------------|--------------|-----------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|  | SP111<br>PN: 41L/LTE-NA<br>(1/2.8") | 4MP<br>2688*1520<br>@15fps | Fixed Lens<br>2.8mm/6mm | H111°/D128°/V61°<br>(2.8mm)<br>H52.8°/D60.4°/V29.7°<br>(6mm) | Up to 20m   | 850nm          | /                     | IP67         | € 3219,00 | <ul style="list-style-type: none"> <li>* Support 4G LTE; Nano SIM; microSD, up to 1TB; MQTT&amp;HTTP Protocol</li> <li>* Solar-powered supported</li> <li>* Built-in High-accuracy GPS Module</li> <li>* Support Object Classes, Intrusion Detection, Line Crossing, Advanced Motion Detection, Tamper Detection</li> <li>* Intelligent Algorithm Confirmation</li> <li>* Operational Temperature: Charging: -20℃ ~45℃, Discharging: -20℃ ~60℃</li> <li>* IR Wave Length: 850nm</li> </ul> <p>Optional:</p> <ul style="list-style-type: none"> <li>* Modular Battery B90</li> <li>* Solar Power Modules SPK1S90836</li> <li>* Solar Pannel Modules ZM90M10-24S1</li> <li>* Power adapter XLG-75-12-A</li> </ul> |
|  | SP111<br>PN: 41L/LTE-NA<br>(1/2.8") | 4MP<br>2688*1520<br>@15fps | Fixed Lens<br>16mm      | H19.4°/D22.2°/V11°<br>(16mm)                                 | Up to 20m   | 850nm<br>740nm | 70km/h                | IP67         | € 4019,00 | <ul style="list-style-type: none"> <li>* Support 4G LTE; Nano SIM; microSD, up to 1TB; MQTT&amp;HTTP Protocol</li> <li>* Solar-powered supported</li> <li>* Built-in High-accuracy GPS Module</li> <li>* No-plate Vehicle Capture, License Plate Recognition, Vehicle type Recognition</li> <li>* Intelligent Algorithm Confirmation</li> <li>* Operational Temperature: Charging: -20℃ ~45℃, Discharging: -20℃ ~60℃</li> <li>* IR Wave Length: 850nm ,740nm</li> </ul> <p>Optional:</p> <ul style="list-style-type: none"> <li>* Modular Battery B90</li> <li>* Solar Power Modules SPK1S90836</li> <li>* Solar Pannel Modules ZM90M10-24S1</li> <li>* Power adapter XLG-75-12-A</li> </ul>                    |

| 4G Solar-powered Security Camera Kit                                             |                                               |             |                         |                         |                     |                 |                 |              |            |                                                                                                                                                                                                                                                                                                                        |
|----------------------------------------------------------------------------------|-----------------------------------------------|-------------|-------------------------|-------------------------|---------------------|-----------------|-----------------|--------------|------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Picture                                                                          | Model                                         | Series      | Resolution              | Lens                    | Solar Power Modules |                 |                 | IP&IK Rating | Listino €  | Features                                                                                                                                                                                                                                                                                                               |
|                                                                                  |                                               |             |                         |                         | Bracket             | Battery box B36 | Solar Panel S90 |              |            |                                                                                                                                                                                                                                                                                                                        |
|  | <b>SP111 S90B36</b><br>PN: 41/LTE-NA (1/2.8") | Smart Event | 4MP<br>2688*1520 @15fps | Fixed Lens<br>2.8mm/6mm | ✓                   | 4*90Wh Battery  | ✓               | IP67         | € 5.350,00 | * SP111 with Solar Power Modules SPK1S90B36<br>* All-in-One Wireless Solution<br>* Battery: Achieve up to 9 days of extended standby time<br>* Intelligent Energy-saving Operation Mode: Performance Mode/Sleep Mode/Eco Mode<br>* Advanced AI algorithms enable precise detection and alerting of abnormal situations |
|  | SP111 S90B36<br>PN: 41/LTE-NA (1/2.8")        | ANPR        | 4MP<br>2688*1520 @15fps | Fixed Lens<br>16mm      | ✓                   | 4*90Wh Battery  | ✓               | IP67         | € 7.683,00 | * Effortless Modular Installation<br>* Capable of withstanding up to level 12 winds                                                                                                                                                                                                                                    |
|  | SP111 B36<br>PN: 41/LTE-NA (1/2.8")           | Smart Event | 4MP<br>2688*1520 @15fps | Fixed Lens<br>2.8mm/6mm | ✓                   | 4*90Wh Battery  | N/A             | IP67         | € 4.869,00 | * SP111 with Solar Power Modules SPK1B36<br>* All-in-One Wireless Solution<br>* Battery: Achieve up to 9 days of extended standby time<br>* Intelligent Energy-saving Operation Mode: Performance Mode/Sleep Mode/Eco Mode<br>* Advanced AI algorithms enable precise detection and alerting of abnormal situations    |
|  | SP111 B36<br>PN: 41/LTE-NA (1/2.8")           | ANPR        | 4MP<br>2688*1520 @15fps | Fixed Lens<br>16mm      | ✓                   | 4*90Wh Battery  | N/A             | IP67         | € 5.670,00 | * Effortless Modular Installation<br>* Capable of withstanding up to level 12 winds                                                                                                                                                                                                                                    |

| AI Color <sup>+</sup> Vandal-proof Mini Bullet Network Camera                      |                                                                                                  |                             |                     |                        |                       |       |                       |              |           |                                                                                                                                                                                                                       |
|------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------|-----------------------------|---------------------|------------------------|-----------------------|-------|-----------------------|--------------|-----------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Picture                                                                            | Model                                                                                            | Resolution                  | Lens                | Field of View          | Ultra Low-light       | WDR   | Illumination Distance | IP&IK Rating | Listino € | Features                                                                                                                                                                                                              |
|  |  MS-C2964-UPD   | 2MP<br>1920*1080 @30fps     | Fixed Lens<br>2.8mm | H109°<br>D125°<br>V61° | Color: 0.001Lux @F1.0 | 120dB | 30m                   | IP67<br>IK10 | € 345,00  | * Full-color Image Performance<br>* F1.0 Super Aperture<br>* Support PoE; SD card, up to 1TB; 3-Axis Design<br>* Support H.265 + /H.265/H.264 + /H.264<br>* Video Content Analysis<br>* Crossing Line People Counting |
|                                                                                    |  MS-C5364-UPD | 5MP<br>2592*1944 @30fps     | Fixed Lens<br>2.8mm | H104°<br>D129°<br>V78° | Color: 0.002Lux @F1.0 | 120dB | 30m                   | IP67<br>IK10 | € 416, 00 |                                                                                                                                                                                                                       |
|                                                                                    |  MS-C8164-UPD | 8MP(4K)<br>3840*2160 @30fps | Fixed Lens<br>2.8mm | H108°<br>D125°<br>V60° | Color: 0.005Lux @F1.0 | 120dB | 30m                   | IP67<br>IK10 | € 499,00  |                                                                                                                                                                                                                       |

AI Mini Series

| AI IR Mini Dome Network Camera                                                                                                                                           |                                                                                                                                |                             |                     |                        |                       |       |             |              |           |                                                                                                                                                                                                                                                                |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------|-----------------------------|---------------------|------------------------|-----------------------|-------|-------------|--------------|-----------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Picture                                                                                                                                                                  | Model                                                                                                                          | Resolution                  | Lens                | Field of View          | Ultra Low-light       | WDR   | IR Distance | IP&IK Rating | Listino € | Features                                                                                                                                                                                                                                                       |
| <br> |  MS-C2983-PD                                | 2MP<br>1920*1080 @30fps     | Fixed Lens<br>2.8mm | H111°<br>D128°<br>V61° | Color: 0.005Lux @F1.6 | 120dB | 20m         | N/A          | 269,00    | * Support PoE; Built-in Microphone; SD card, up to 1TB; 3-Axis Design<br>* Support H.265 + /H.265/H.264 + /H.264;<br>* Video Content Analysis<br>* Crossing Line People Counting<br><br>Optional:<br>* Lens 4mm/6mm, Black Housing<br>* No Built-in Microphone |
|                                                                                                                                                                          |  <b>MS-C4583-PD</b>                         | 4MP<br>2688*1520 @30fps     | Fixed Lens<br>2.8mm | H106°<br>D124°<br>V58° | Color: 0.005Lux @F1.6 | 120dB | 20m         | N/A          | 316,00    |                                                                                                                                                                                                                                                                |
|                                                                                                                                                                          |  <b>MS-C5383-PD</b><br><b>MS-C5383-PD/N</b> | 5MP<br>2592*1944 @30fps     | Fixed Lens<br>2.8mm | H105°<br>D131°<br>V78° | Color: 0.008Lux @F1.6 | 120dB | 20m         | N/A          | 340,00    |                                                                                                                                                                                                                                                                |
|                                                                                                                                                                          |  MS-C8183-PD                                | 8MP(4K)<br>3840*2160 @30fps | Fixed Lens<br>2.8mm | H110°<br>D126°<br>V60° | Color: 0.012Lux @F1.6 | 120dB | 20m         | N/A          | 425,00    |                                                                                                                                                                                                                                                                |

| AI Vandal-proof Mini Dome Network Camera                                                                                                                                 |                                                                                                 |                             |                     |                        |                       |       |             |              |           |                                                                                                                                                                                                                                                                |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------|-----------------------------|---------------------|------------------------|-----------------------|-------|-------------|--------------|-----------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Picture                                                                                                                                                                  | Model                                                                                           | Resolution                  | Lens                | Field of View          | Ultra Low-light       | WDR   | IR Distance | IP&IK Rating | Listino € | Features                                                                                                                                                                                                                                                       |
| <br> |  MS-C2973-PD | 2MP<br>1920*1080 @30fps     | Fixed Lens<br>2.8mm | H111°<br>D128°<br>V61° | Color: 0.005Lux @F1.6 | 120dB | 30m         | IP67<br>IK10 | 279,00    | * Support PoE; Built-in Microphone; SD card, up to 1TB; 3-Axis Design<br>* Support H.265 + /H.265/H.264 + /H.264;<br>* Video Content Analysis<br>* Crossing Line People Counting<br><br>Optional:<br>* Lens 4mm/6mm, Black Housing<br>* No Built-in Microphone |
|                                                                                                                                                                          |  MS-C4573-PD | 4MP<br>2688*1520 @30fps     | Fixed Lens<br>2.8mm | H106°<br>D124°<br>V58° | Color: 0.005Lux @F1.6 | 120dB | 30m         | IP67<br>IK10 | 326,00    |                                                                                                                                                                                                                                                                |
|                                                                                                                                                                          |  MS-C5373-PD | 5MP<br>2592*1944 @30fps     | Fixed Lens<br>2.8mm | H105°<br>D131°<br>V78° | Color: 0.008Lux @F1.6 | 120dB | 30m         | IP67<br>IK10 | 354,00    |                                                                                                                                                                                                                                                                |
|                                                                                                                                                                          |  MS-C8173-PD | 8MP(4K)<br>3840*2160 @30fps | Fixed Lens<br>2.8mm | H110°<br>D126°<br>V60° | Color: 0.012Lux @F1.6 | 120dB | 30m         | IP67<br>IK10 | 435,00    |                                                                                                                                                                                                                                                                |

| AI Vandal-proof Mini Bullet Network Camera                                         |                                                                                                                                                                                          |                                       |                              |                                       |                          |       |             |              |           |                                                                                                                                                                                                                                                                           |
|------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------|------------------------------|---------------------------------------|--------------------------|-------|-------------|--------------|-----------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Picture                                                                            | Model                                                                                                                                                                                    | Resolution                            | Lens                         | Field of View                         | Ultra Low-light          | WDR   | IR Distance | IP&IK Rating | Listino € | Features                                                                                                                                                                                                                                                                  |
|    | <br>MS-C2964-PD                                                                                         | <b>2MP</b><br>1920*1080<br>@30fps     | Fixed Lens<br>2.8mm          | H111°<br>D128°<br>V61°                | Color: 0.005Lux<br>@F1.6 | 120dB | 30m         | IP67<br>IK10 | 279,00    | * Support PoE; SD card, up to 1TB; 3-Axis Design<br>* Support H.265 + /H.265/H.264 + /H.264<br>* Video Content Analysis<br>* Crossing Line People Counting                                                                                                                |
|                                                                                    | <br><b>MS-C4564-PD</b>                                                                                  | <b>4MP</b><br>2688*1520<br>@30fps     | Fixed Lens<br>2.8mm          | H106°<br>D124°<br>V58°                | Color: 0.005Lux<br>@F1.6 | 120dB | 30m         | IP67<br>IK10 | 326,00    |                                                                                                                                                                                                                                                                           |
|                                                                                    | <br><b>MS-C5364-PD-JB</b><br><b>MS-C5364-PD-JB/N</b>                                                    | <b>5MP</b><br>2592*1944<br>@30fps     | Fixed Lens<br>2.8mm          | H105°<br>D131°<br>V78°                | Color: 0.008Lux<br>@F1.6 | 120dB | 30m         | IP67<br>IK10 | 378,00    |                                                                                                                                                                                                                                                                           |
|                                                                                    | <br><b>MS-C8164-PD-JB</b>                                                                               | <b>8MP(4K)</b><br>3840*2160<br>@30fps | Fixed Lens<br>2.8mm          | H110°<br>D126°<br>V60°                | Color: 0.012Lux<br>@F1.6 | 120dB | 30m         | IP67<br>IK10 | 458,00    |                                                                                                                                                                                                                                                                           |
| AI Weather-proof Mini Dome Network Camera                                          |                                                                                                                                                                                          |                                       |                              |                                       |                          |       |             |              |           |                                                                                                                                                                                                                                                                           |
| Picture                                                                            | Model                                                                                                                                                                                    | Resolution                            | Lens                         | Field of View                         | Ultra Low-light          | WDR   | IR Distance | IP&IK Rating | Listino € | Features                                                                                                                                                                                                                                                                  |
|    | <br>MS-C2975-PD                                                                                         | <b>2MP</b><br>1920*1080<br>@30fps     | Fixed Lens<br>2.8mm          | H111°<br>D128°<br>V61°                | Color: 0.005Lux<br>@F1.6 | 120dB | 25m         | IP67<br>IK10 | 293,00    | * Support PoE; Built-in Microphone; SD card, up to 1TB; 3-Axis Design<br>* Support H.265 + /H.265/H.264 + /H.264;<br>* Video Content Analysis<br>* Crossing Line People Counting<br><br>Optional:<br>* Lens 4mm/6mm, Black Housing<br>* No Built-in Microphone            |
|                                                                                    | <br><b>MS-C4575-PD</b>                                                                                  | <b>4MP</b><br>2688x1520<br>@30fps     | Fixed Lens<br>2.8mm          | H106°<br>D124°<br>V58°                | Color: 0.005Lux<br>@F1.6 | 120dB | 25m         | IP67<br>IK10 | 335,00    |                                                                                                                                                                                                                                                                           |
|                                                                                    | <br><b>MS-C5375-PD-JB</b><br><b>MS-C5375-PD-JB/N</b>                                                    | <b>5MP</b><br>2592*1944<br>@30fps     | Fixed Lens<br>2.8mm          | H105°<br>D131°<br>V78°                | Color: 0.008Lux<br>@F1.6 | 120dB | 25m         | IP67<br>IK10 | 411,00    |                                                                                                                                                                                                                                                                           |
|                                                                                    | <br><b>MS-C8175-PD-JB</b>                                                                               | <b>8MP(4K)</b><br>3840*2160<br>@30fps | Fixed Lens<br>2.8mm          | H110°<br>D126°<br>V60°                | Color: 0.012Lux<br>@F1.6 | 120dB | 25m         | IP67<br>IK10 | 482,00    |                                                                                                                                                                                                                                                                           |
| AI Weather-proof Mini Bullet Network Camera                                        |                                                                                                                                                                                          |                                       |                              |                                       |                          |       |             |              |           |                                                                                                                                                                                                                                                                           |
| Picture                                                                            | Model                                                                                                                                                                                    | Resolution                            | Lens                         | Field of View                         | Ultra Low-light          | WDR   | IR Distance | IP&IK Rating | Listino € | Features                                                                                                                                                                                                                                                                  |
|  |  <br>MS-C2963-RPE  | <b>2MP</b><br>1920*1080<br>@60fps     | Fixed Lens<br>4mm            | H91°<br>D106°<br>V50°                 | Color: 0.005Lux<br>@F1.6 | 140dB | 50m         | IP67<br>IK10 | 416,00    | * Support PoE; SD card, up to 1TB; 3-Axis Design<br>* Support H.265 + /H.265/H.264 + /H.264<br>* Video Content Analysis, Object Counting (Crossing Line People/Vehicle, Regional People), Heat Map,Face Detection<br><br>Optional:<br>* Lens 2.8mm/6mm<br>* Black Housing |
|                                                                                    | <br><b>MS-C5363-PE</b><br><b>MS-C5363-PE/4</b><br><b>MS-C5363-PE/4/N</b>                              | <b>5MP</b><br>2592*1944<br>@30fps     | Fixed Lens<br>2,8mm          | H86°<br>D108°<br>V63°                 | Color: 0.008Lux<br>@F1.6 | 120dB | 50m         | IP67<br>IK10 | 439,00    |                                                                                                                                                                                                                                                                           |
|                                                                                    | 4mm                                                                                                                                                                                      |                                       | 491,00                       |                                       |                          |       |             |              |           |                                                                                                                                                                                                                                                                           |
|                                                                                    | <br>MS-C8163-PE                                                                                       | <b>8MP(4K)</b><br>3840*2160<br>@30fps | Fixed Lens<br>4mm            | H91°<br>D106°<br>V50°                 | Color: 0.012Lux<br>@F1.6 | 120dB | 50m         | IP67<br>IK10 | 477,00    |                                                                                                                                                                                                                                                                           |
| AI Motorized Dome Network Camera                                                   |                                                                                                                                                                                          |                                       |                              |                                       |                          |       |             |              |           |                                                                                                                                                                                                                                                                           |
| Picture                                                                            | Model                                                                                                                                                                                    | Resolution                            | Lens                         | Field of View                         | Ultra Low-light          | WDR   | IR Distance | IP&IK Rating | Listino € | Features                                                                                                                                                                                                                                                                  |
|  | <br>MS-C2975-RFPD                                                                                     | <b>2MP</b><br>1920*1080<br>@60fps     | Motorized lens<br>2.7~13.5mm | H111°~H34°<br>D130°~D39°<br>V60°~V19° | Color: 0.005Lux<br>@F1.4 | 120dB | 50m         | IP67<br>IK10 | 491,00    | * Support PoE; Built-in Microphone; SD card, up to 1TB; 3-Axis Design<br>* Support H.265 + /H.265/H.264 + /H.264;<br>* Video Content Analysis<br>* Crossing Line People Counting<br><br>Optional:<br>* Black Housing<br>* No Built-in Microphone<br>* Junction Box A84    |
|                                                                                    | <br>MS-C4575-FPD                                                                                      | <b>4MP</b><br>2688*1520<br>@30fps     | Motorized lens<br>2.7~13.5mm | H97°~H28°<br>D110°~D32°<br>V55°~V16°  | Color: 0.005Lux<br>@F1.4 | 120dB | 50m         | IP67<br>IK10 | 505,00    |                                                                                                                                                                                                                                                                           |
|                                                                                    | <br><b>MS-C5375-FPD</b><br><b>MS-C5375-FPD/N</b>                                                      | <b>5MP</b><br>2592*1944<br>@30fps     | Motorized lens<br>2.7~13.5mm | H99°~H31°<br>D124°~D38°<br>V72°~V23°  | Color: 0.008Lux<br>@F1.4 | 120dB | 50m         | IP67<br>IK10 | 510,00    |                                                                                                                                                                                                                                                                           |
|                                                                                    | <br><b>MS-C8175-FPD</b>                                                                               | <b>8MP(4K)</b><br>3840*2160<br>@30fps | Motorized lens<br>2.7~13.5mm | H107°~H33°<br>D125°~D37°<br>V58°~V18° | Color: 0.012Lux<br>@F1.4 | 120dB | 50m         | IP67<br>IK10 | 605,00    |                                                                                                                                                                                                                                                                           |
| AI Motorized Bullet Network Camera                                                 |                                                                                                                                                                                          |                                       |                              |                                       |                          |       |             |              |           |                                                                                                                                                                                                                                                                           |
| Picture                                                                            | Model                                                                                                                                                                                    | Resolution                            | Lens                         | Field of View                         | Ultra Low-light          | WDR   | IR Distance | IP&IK Rating | Partner   | Features                                                                                                                                                                                                                                                                  |
|  |  <br>MS-C2964-RFPE | <b>2MP</b><br>1920*1080<br>@60fps     | Motorized lens<br>2.7~13.5mm | H111°~H34°<br>D130°~D39°<br>V60°~V19° | Color: 0.005Lux<br>@F1.4 | 140dB | 50m         | IP67<br>IK10 | 510,00    | * Support PoE; SD card, up to 1TB; 3-Axis Design<br>* Support H.265 + /H.265/H.264 + /H.264<br>* Video Content Analysis,Object Counting (Crossing Line People/Vehicle, Regional People), Heat Map,Face Detection<br><br>Optional:<br>* Black Housing                      |
|                                                                                    | <br>MS-C5364-FPE                                                                                      | <b>5MP</b><br>2592*1944<br>@30fps     | Motorized lens<br>2.7~13.5mm | H99°~H31°<br>D124°~D38°<br>V72°~V23°  | Color: 0.008Lux<br>@F1.4 | 120dB | 50m         | IP67<br>IK10 | 548,00    |                                                                                                                                                                                                                                                                           |
|                                                                                    | <br>MS-C8164-FPE                                                                                      | <b>8MP(4K)</b><br>3840*2160<br>@30fps | Motorized lens<br>2.7~13.5mm | H107°~H33°<br>D125°~D37°<br>V58°~V18° | Color: 0.012Lux<br>@F1.4 | 120dB | 50m         | IP67<br>IK10 | 614,00    |                                                                                                                                                                                                                                                                           |

AI Pro Series

| AI Motorized Pro Dome Network Camera                                                                                                                                |                                                                                                                                                                                                  |                                |                              |                                       |                          |       |             |              |           |                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------|------------------------------|---------------------------------------|--------------------------|-------|-------------|--------------|-----------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Picture                                                                                                                                                             | Model                                                                                                                                                                                            | Resolution                     | Lens                         | Field of View                         | Ultra Low-light          | WDR   | IR Distance | IP&IK Rating | Listino € | Features                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| <br> |  <br>MS-C2972-RFPE<br>(1/2.8") | 2MP<br>1920*1080<br>@60fps     | Motorized lens<br>2.7~13.5mm | H115°~H34°<br>D135°~D39°<br>V62°~V19° | Color: 0.005Lux<br>@F1.4 | 140dB | 50m         | IP67<br>IK10 | 629,00    | <ul style="list-style-type: none"><li>* Support PoE; SD card, up to 1TB; 3-Axis Design</li><li>* Support H.265 + /H.265/H.264 + /H.264</li><li>* Support Multi-Interface Cable Versions</li><li>* Integrated Cable Management</li><li>* Multi port: Built-in Mic, Alarm I/O, Audio out, Ethernet Port(PoE), DC 12V</li><li>* Video Content Analysis, Object Counting (Crossing Line People/Vehicle, Regional People) ,Heat Map,Face Detection</li></ul> |
|                                                                                                                                                                     |  <br>MS-C4472-RFPE<br>(1/1.8") | 4MP<br>2688*1520<br>@60fps     | Motorized lens<br>3.6~10mm   | H96°~H42°<br>D111°~D48°<br>V55°~V23°  | Color: 0.002Lux<br>@F1.4 | 140dB | 50m         | IP67<br>IK10 | 884,00    |                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
|                                                                                                                                                                     | <br>MS-C5372-FPE<br>(1/2.8")                                                                                    | 5MP<br>2592*1944<br>@30fps     | Motorized lens<br>2.7~13.5mm | H89°~H30°<br>D111°~D37°<br>V66°~V22°  | Color: 0.008Lux<br>@F1.4 | 120dB | 50m         | IP67<br>IK10 | 662,00    |                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
|                                                                                                                                                                     |  <br>MS-C6772-FPE<br>(1/2.4")  | 6MP<br>3200*1800<br>@30fps     | Motorized lens<br>2.7~13.5mm | H112°~H38°<br>D129°~D44°<br>V61°~V22° | Color: 0.005Lux<br>@F1.6 | 120dB | 50m         | IP67<br>IK10 | 695,00    |                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
|                                                                                                                                                                     | <br>MS-C8172-FPE<br>(1/2.8")                                                                                    | 8MP(4K)<br>3840*2160<br>@30fps | Motorized lens<br>2.7~13.5mm | H96°~H33°<br>D112°~D37°<br>V53°~V18°  | Color: 0.012Lux<br>@F1.4 | 120dB | 50m         | IP67<br>IK10 | 713,00    |                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
|                                                                                                                                                                     | <br>MS-C8272-FPE<br>(1/1.8")                                                                                    | 8MP(4K)<br>3840*2160<br>@30fps | Motorized lens<br>3.6~10mm   | H110°~H46°<br>D126°~D54°<br>V61°~V25° | Color: 0.009Lux<br>@F1.4 | 120dB | 50m         | IP67<br>IK10 | 874,00    | Optional:<br><ul style="list-style-type: none"><li>* Black Housing , Smoked Dome Cover AC-72</li><li>* No Built-in Microphone</li></ul>                                                                                                                                                                                                                                                                                                                 |

| AI Motorized Pro Bullet Network Camera                                                                                                                                 |                                                                                                                                                                                                  |                                |                              |                                       |                          |       |             |              |           |                                                                                                                                                                                                                                                                                                                                                                      |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------|------------------------------|---------------------------------------|--------------------------|-------|-------------|--------------|-----------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Picture                                                                                                                                                                | Model                                                                                                                                                                                            | Resolution                     | Lens                         | Field of View                         | Ultra Low-light          | WDR   | IR Distance | IP&IK Rating | Listino € | Features                                                                                                                                                                                                                                                                                                                                                             |
| <br> |  <br>MS-C2962-RFPE<br>(1/2.8") | 2MP<br>1920*1080<br>@60fps     | Motorized lens<br>2.7~13.5mm | H92°~H32°<br>D107°~D37°<br>V51°~V18°  | Color: 0.005Lux<br>@F1.4 | 140dB | 60m         | IP67         | 633,00    | <ul style="list-style-type: none"><li>* Support PoE; SD card, up to 1TB; 3-Axis Design</li><li>* Support H.265 + /H.265/H.264 + /H.264</li><li>* Integrated Cable Management</li><li>* Multi Port: Alarm I/O, Audio I/O, DC 12V</li><li>* Video Content Analysis, Object Counting (Crossing Line People/Vehicle, Regional People) ,Heat Map,Face Detection</li></ul> |
|                                                                                                                                                                        | <br>MS-C5362-FPE<br>(1/2.8")                                                                                    | 5MP<br>2592*1944<br>@30fps     | Motorized lens<br>2.7~13.5mm | H89°~H30°<br>D111°~D37°<br>V66°~V22°  | Color: 0.008Lux<br>@F1.4 | 120dB | 60m         | IP67         | 670,00    |                                                                                                                                                                                                                                                                                                                                                                      |
|                                                                                                                                                                        | <br>MS-C6762-FPE<br>(1/2.4")                                                                                   | 6MP<br>3200*1800<br>@30fps     | Motorized lens<br>2.7~13.5mm | H112°~H38°<br>D129°~D44°<br>V61°~V22° | Color: 0.005Lux<br>@F1.6 | 120dB | 60m         | IP67         | 700,00    |                                                                                                                                                                                                                                                                                                                                                                      |
|                                                                                                                                                                        | <br>MS-C8162-FPE<br>(1/2.8")                                                                                  | 8MP(4K)<br>3840*2160<br>@30fps | Motorized lens<br>2.7~13.5mm | H96°~H33°<br>D112°~D37°<br>V53°~V18°  | Color: 0.012Lux<br>@F1.4 | 120dB | 60m         | IP67         | 719,00    | Optional:<br><ul style="list-style-type: none"><li>* Junction Box A62</li><li>* Black Housing: € 49,00</li></ul>                                                                                                                                                                                                                                                     |

| AI Motorized Pro Bullet Plus Network Camera                                                                                                                              |                                                                                                                                                                                                      |                                |                              |                                       |                          |       |             |              |           |                                                                                                                                                                                                                                                                                                                                                                                     |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------|------------------------------|---------------------------------------|--------------------------|-------|-------------|--------------|-----------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Picture                                                                                                                                                                  | Model                                                                                                                                                                                                | Resolution                     | Lens                         | Field of View                         | Ultra Low-light          | WDR   | IR Distance | IP&IK Rating | Listino € | Features                                                                                                                                                                                                                                                                                                                                                                            |
| <br> |  <br>MS-C2966-RFPE<br>(1/2.8") | 2MP<br>1920*1080<br>@60fps     | Motorized lens<br>2.7~13.5mm | H113°~H33°<br>D130°~D38°<br>V60°~V18° | Color: 0.005Lux<br>@F1.4 | 140dB | 65m         | IP67<br>IK10 | 680,00    | <ul style="list-style-type: none"><li>* Support PoE; SD card, up to 1TB; 3-Axis Design; 4KV Surge Protection,</li><li>* Support H.265 + /H.265/H.264 + /H.264</li><li>* Integrated Cable Management</li><li>* Multi Port: Alarm I/O, Audio I/O, Ethernet Port(PoE), DC 12V</li><li>* Video Content Analysis, Object Counting(People&amp;Vehicle), Heat Map,Face Detection</li></ul> |
|                                                                                                                                                                          |  <br>MS-C4466-RFPE<br>(1/1.8") | 4MP<br>2688*1520<br>@60fps     | Motorized lens<br>3.6~10mm   | H100°~H45°<br>D116°~D51°<br>V57°~V25° | Color: 0.002Lux<br>@F1.4 | 140dB | 65m         | IP67<br>IK10 | 893,00    |                                                                                                                                                                                                                                                                                                                                                                                     |
|                                                                                                                                                                          | <br>MS-C5366-FPE<br>(1/2.8")                                                                                      | 5MP<br>2592*1944<br>@30fps     | Motorized lens<br>2.7~13.5mm | H113°~H33°<br>D138°~D42°<br>V83°~V25° | Color: 0.008Lux<br>@F1.4 | 120dB | 65m         | IP67<br>IK10 | 725,00    |                                                                                                                                                                                                                                                                                                                                                                                     |
|                                                                                                                                                                          |  <br>MS-C6766-FPE<br>(1/2.4")  | 6MP<br>3200*1800<br>@30fps     | Motorized lens<br>2.7~13.5mm | H112°~H38°<br>D129°~D44°<br>V61°~V22° | Color: 0.005Lux<br>@F1.6 | 120dB | 65m         | IP67<br>IK10 | 747,00    |                                                                                                                                                                                                                                                                                                                                                                                     |
|                                                                                                                                                                          | <br>MS-C8166-FPE<br>(1/2.8")                                                                                      | 8MP(4K)<br>3840*2160<br>@30fps | Motorized lens<br>2.7~13.5mm | H110°~H33°<br>D128°~D38°<br>V60°~V18° | Color: 0.012Lux<br>@F1.4 | 120dB | 65m         | IP67<br>IK10 | 765,00    |                                                                                                                                                                                                                                                                                                                                                                                     |
|                                                                                                                                                                          | <br>MS-C8266-FPE<br>(1/1.8")                                                                                      | 8MP(4K)<br>3840*2160<br>@30fps | Motorized lens<br>3.6~10mm   | H116°~H48°<br>D134°~D55°<br>V65°~V27° | Color: 0.009Lux<br>@F1.4 | 120dB | 65m         | IP67<br>IK10 | 935,00    | Optional:<br><ul style="list-style-type: none"><li>* Black Housing: € 49,00</li><li>* Fire Smoke Detection or Hard Hat Detection (Only one of the two functions can be fulfilled at the same time.)</li></ul>                                                                                                                                                                       |

| AI 4X/12X Pro Bullet Plus Network Camera                                                                                                                                 |                                                                                                                                                                                                        |                                |                            |                                    |                          |       |             |              |           |                                                                                                                                                                                                                                                                                                                                                                                                                 |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------|----------------------------|------------------------------------|--------------------------|-------|-------------|--------------|-----------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Picture                                                                                                                                                                  | Model                                                                                                                                                                                                  | Resolution                     | Lens                       | Field of View                      | Ultra Low-light          | WDR   | IR Distance | IP&IK Rating | Listino € | Features                                                                                                                                                                                                                                                                                                                                                                                                        |
| <br> |  <br>MS-C2966-X12RPE<br>(1/2.8") | 2MP<br>1920*1080<br>@60fps     | 12X<br>AF Lens<br>5.3~64mm | H61°~H5°<br>D69°~D5°<br>V36°~V2°   | Color: 0.005Lux<br>@F1.6 | 140dB | 180m        | IP67<br>IK10 | 775,00    | <ul style="list-style-type: none"><li>* Support PoE; SD card, up to 1TB; 3-Axis Design; 4KV Surge Protection,</li><li>* Support H.265 + /H.265/H.264 + /H.264</li><li>* Integrated Cable Management</li><li>* Multi Port: Alarm I/O, Audio I/O, Ethernet Port(PoE), DC 12V</li><li>* Video Content Analysis, Object Counting (Crossing Line People/Vehicle, Regional People), Heat Map,Face Detection</li></ul> |
|                                                                                                                                                                          |  <br>MS-C4466-X4RPE<br>(1/1.8")  | 4MP<br>2688*1520<br>@60fps     | 4X<br>AF Lens<br>8~32mm    | H44°~H13°<br>D51°~D15°<br>V25°~V7° | Color: 0.002Lux<br>@F1.6 | 140dB | 180m        | IP67<br>IK10 | 1.040,00  |                                                                                                                                                                                                                                                                                                                                                                                                                 |
|                                                                                                                                                                          | <br>MS-C5366-X12PE<br>(1/2.8")                                                                                      | 5MP<br>2592*1944<br>@30fps     | 12X<br>AF Lens<br>5.3~64mm | H57°~H4°<br>D69°~D5°<br>V44°~V1°   | Color: 0.008Lux<br>@F1.6 | 120dB | 180m        | IP67<br>IK10 | 809,00    |                                                                                                                                                                                                                                                                                                                                                                                                                 |
|                                                                                                                                                                          | <br>MS-C8266-X4PE<br>(1/1.8")                                                                                       | 8MP(4K)<br>3840*2160<br>@30fps | 4X<br>AF Lens<br>8~32mm    | H44°~H13°<br>D51°~D15°<br>V25°~V7° | Color: 0.009Lux<br>@F1.6 | 120dB | 180m        | IP67<br>IK10 | 809,00    |                                                                                                                                                                                                                                                                                                                                                                                                                 |

AI Panoramic Series

| AI 180° Panoramic Mini Dome Network Camera                                         |                                                          |                                           |                             |                                           |                          |       |             |              |           |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
|------------------------------------------------------------------------------------|----------------------------------------------------------|-------------------------------------------|-----------------------------|-------------------------------------------|--------------------------|-------|-------------|--------------|-----------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Picture                                                                            | Model                                                    | Resolution                                | Lens                        | Field of View                             | Ultra Low-light          | WDR   | IR Distance | IP&IK Rating | Listino € | Features                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
|    | <div>Starlight</div> <div>MS-C5376-PE</div>              | <b>5MP</b><br>2592*1944<br>@30fps         | Fixed Lens<br>1.68mm        | H180°<br>V95°                             | Color: 0.008Lux<br>@F2.0 | 120dB | 15m         | IP67<br>IK10 | 581,00    | * Support PoE; Built-in Microphone; SD card, up to 1TB<br>* Support H.265 + /H.265/H.264 + /H.264<br>* Integrated Junction Box<br>* Video Content Analysis, Object Counting (Crossing Line People/Vehicle, Regional People), Heat Map                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
|                                                                                    | <div>4K</div> <div>MS-C8176-PE</div>                     | <b>8MP(4K)</b><br>3840*2160<br>@25fps     | Fixed Lens<br>1.68mm        | H180°<br>V86°                             | Color: 0.012Lux<br>@F2.0 | 120dB | 15m         | IP67<br>IK10 | 619,00    | Optional:<br>* Black Housing<br>* No Built-in Microphone                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| AI 180° Panoramic Mini Bullet Network Camera                                       |                                                          |                                           |                             |                                           |                          |       |             |              |           |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| Picture                                                                            | Model                                                    | Resolution                                | Lens                        | Field of View                             | Ultra Low-light          | WDR   | IR Distance | IP&IK Rating | Listino € | Features                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
|    | <div>Starlight</div> <div>MS-C5365-PE</div>              | <b>5MP</b><br>2592*1944<br>@30fps         | Fixed Lens<br>1.68mm        | H180°<br>V95°                             | Color: 0.008Lux<br>@F2.0 | 120dB | 15m         | IP67<br>IK10 | 595,00    | * Support PoE; Built-in Microphone; SD card, up to 1TB<br>* Support H.265 + /H.265/H.264 + /H.264<br>* Integrated Junction Box<br>* Video Content Analysis, Object Counting (Crossing Line People/Vehicle, Regional People), Heat Map                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
|                                                                                    | <div>4K</div> <div>MS-C8165-PE</div>                     | <b>8MP(4K)</b><br>3840*2160<br>@25fps     | Fixed Lens<br>1.68mm        | H180°<br>V86°                             | Color: 0.012Lux<br>@F2.0 | 120dB | 15m         | IP67<br>IK10 | 633,00    | Optional:<br>* Black Housing<br>* No Built-in Microphone                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| AI 360° Panoramic Fisheye Network Camera                                           |                                                          |                                           |                             |                                           |                          |       |             |              |           |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| Picture                                                                            | Model                                                    | Imaging Device                            | Lens                        | Field of View                             | Ultra Low-light          | WDR   | IR Distance | IP&IK Rating | Listino € | Features                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
|   | <div>4K</div> <div>MS-C8274-PA<br/>(1/1.8")</div>        | 1/1.8" 4K<br>CMOS                         | Fixed Lens<br>1.5mm         | Ceiling: 360°<br>Wall: 180°<br>Flat: 360° | Color: 0.008Lux<br>@F1.8 | 120dB | 15m         | IP67<br>IK10 | 893,00    | * Support PoE; Built-in Microphone; SD card, up to 256G<br>* Support H.265 + /H.265/H.264 + /H.264<br>* Support Built-in Mic<br>* Video Content Analysis, People Counting, Heat Map, People Flow Analysis<br>Optional:<br>* No Built-in Microphone                                                                                                                                                                                                                                                                                                                                                                                                                                            |
|                                                                                    | <div>Starlight</div> <div>MS-C9674-PA<br/>(1/1.7")</div> | 1/1.7" 12MP<br>CMOS                       | Fixed Lens<br>1.98mm        | Ceiling: 360°<br>Wall: 180°<br>Flat: 360° | Color: 0.05Lux<br>@F2.8  | 120dB | 15m         | IP67<br>IK10 | 1.356,00  | * Support PoE; Built-in Microphone; SD card, up to 256G<br>* Support H.265 + /H.265/H.264 + /H.264<br>* Multi Port: Built-in Mic, Alarm I/O, Audio I/O, Ethernet Port(PoE), DC 12V<br>* Video Content Analysis, People Counting, Heat Map, People Flow Analysis<br>Optional:<br>* No Built-in Microphone                                                                                                                                                                                                                                                                                                                                                                                      |
| AI Dual-sensor 180° Panoramic Network Camera                                       |                                                          |                                           |                             |                                           |                          |       |             |              |           |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| Picture                                                                            | Model                                                    | Resolution                                | Lens                        | Field of View                             | Ultra Low-light          | WDR   | IR Distance | IP&IK Rating | Listino € | Features                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
|  | <div>4K</div> <div>MS-C8477-PC</div>                     | <b>8MP</b><br>5084*1520<br>@25fps         | Fixed Lens<br>4mm           | H180°<br>V50°                             | Color: 0.002Lux<br>@F1.6 | 140dB | 30m         | IP67<br>IK10 | 959,00    | * Support PoE; Built-in Microphone; SD card, up to 1TB<br>* Support H.265 + /H.265(HEVC)/H.264 + /H.264<br>* Intrusion Detection, Motion Detection,Heat Map<br>Optional:<br>* Wall Mount Bracket A72(V2)<br>* Pendant Mount A76(V2)<br>* No Built-in Microphone                                                                                                                                                                                                                                                                                                                                                                                                                               |
| 4x5MP AI Multi-directional Network Camera                                          |                                                          |                                           |                             |                                           |                          |       |             |              |           |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| Picture                                                                            | Model                                                    | Resolution                                | Lens                        | Field of View                             | Ultra Low-light          | WDR   | IR Distance | IP&IK Rating | Listino € | Features                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
|  | <div>MS-C5321-FPE</div>                                  | <b>20MP(4*5MP)</b><br>2592*1944<br>@30fps | Motorized lens<br>3.2~8.1mm | H87° ~ H40°<br>D109°~D49°<br>V64° ~ V30°  | 0.005Lux<br>@F1.6        | 120dB | 30m         | IP66<br>IK10 | 2.900,00  | * COMS 1/2.8"<br>* Four lenses each support configuring VCA function: Intrusion Detection, Region Entrance, Region Exiting, Advanced Motion Detection, Tamper Detection, line Crossing, Loitering, Objec Left, Object Removed<br>* Support target classification:Human, Motor Vehicle(Car, Motorcycle, Bus, Truck), Non-moto Vehide (Scooter)<br>* Support PoE; SD card; up to 2*1TB<br>* Support Scooter Detection, Every Angle with Flexible Positioning<br>*Built-in 360° IR LED,Integrated Interface Management,Convenientand Simplified, Configuration(Support WIFI connection)<br>Optional:<br>* Pole Mount A44<br>* Pendant Mount A79<br>Compatible solamente con sistemi VMS (No NVR) |

| AI 12X PTZ Bullet Network Camera                                                                                                                                    |                                                                        |                                       |                             |                                  |                          |       |             |              |           |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------|---------------------------------------|-----------------------------|----------------------------------|--------------------------|-------|-------------|--------------|-----------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Picture                                                                                                                                                             | Model                                                                  | Resolution                            | Lens                        | Field of View                    | Ultra Low-light          | WDR   | IR Distance | IP&IK Rating | Listino € | Features                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| <br> | <div>StarlightSuper WDR</div><br>MS-C2961-X12RPE<br>(1/2.8")           | <b>2MP</b><br>1920*1080<br>@60fps     | 12X<br>AF Lens<br>5.3~64mm  | H61°~H5°<br>D69°~D5°<br>V36°~V2° | Color: 0.005Lux<br>@F1.6 | 140dB | 140m        | IP66         | 973,00    | * Support PoE; SD card, up to 1TB; IR LEDs & White LEDs;<br>* Support H.265 + /H.265/H.264 + /H.264;<br>* 12X Optical Zoom, PTZ Position Display, 3D positioning,<br>* 300 Preset Points, 8 Patrols, up to 48 presets each patrol; 4 Patterns<br>* 360° Pan Range; Pan Manual Speed: 0.1°~50°/s, Preset Speed: 50°/s<br>* -45°~30° / Tilt Manual Speed: 0.1°~25°/s, Tilt Preset Speed: 25°/s<br>* DC + PoE + Alarm (Default), DC + PoE + Audio (Optional)<br>* Wall Mount Bracket (Default), Pedestal Mount Bracket (Optional)<br>* AI Based Video Content Analysis, Object Counting (Crossing Line People/Vehicle, Regional People), Face Detection |
|                                                                                                                                                                     | <div>Starlight</div><br><div>Stock</div><br>MS-C5361-X12PE<br>(1/2.8") | <b>5MP</b><br>2592*1944<br>@30fps     | 12X<br>AF Lens<br>5.3~64mm  | H57°~H4°<br>D69°~D5°<br>V44°~V1° | Color: 0.008Lux<br>@F1.6 | 120dB | 140m        | IP66         | 1.021,00  | Optional:<br>* Junction Box A62                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| AI 12X/20X/23X PTZ Bullet Plus Network Camera                                                                                                                       |                                                                        |                                       |                             |                                  |                          |       |             |              |           |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| Picture                                                                                                                                                             | Model                                                                  | Resolution                            | Lens                        | Field of View                    | Ultra Low-light          | WDR   | IR Distance | IP&IK Rating | Listino € | Features                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| <br> | <div>StarlightSuper WDR</div><br>MS-C4467-X20RPE<br>(1/1.8")           | <b>4MP</b><br>2688*1520<br>@60fps     | 20X<br>AF Lens<br>6.4~128mm | H60°~H3°<br>D67°~D4°<br>V37°~V1° | Color: 0.002Lux<br>@F1.6 | 140dB | 180m        | IP66         | 1.739,00  | * Support PoE; SD card, up to 1TB;<br>* Support H.265 + /H.265/H.264 + /H.264;<br>* New-generation PTZ Motor;<br>* 12X/20X/23X Optical Zoom; PTZ Position Display, 3D positioning,<br>* 300 Preset Points, 8 Patrols, up to 48 presets each patrol; 4 Patterns<br>* 360° Pan Range; Pan Manual Speed: 0.1°~60°/s, Preset Speed: 60°/s<br>* -45°~30° / Tilt Manual Speed: 0.1°~30°/s, Tilt Preset Speed: 30°/s<br>* Multi port: Alarm I/O, Audio I/O, Ethernet Port(PoE), DC 12V<br>* AI Based Video Content Analysis, Object Counting (Crossing Line People/Vehicle, Regional People), Face Detection, Vehicle Counting.                             |
|                                                                                                                                                                     | <div>Starlight</div><br><div>Stock</div><br>MS-C5367-X12PE<br>(1/2.8") | <b>5MP</b><br>2592*1944<br>@30fps     | 12X<br>AF Lens<br>5.3~64mm  | H57°~H4°<br>D69°~D5°<br>V44°~V1° | Color: 0.008Lux<br>@F1.6 | 120dB | 180m        | IP66         | 1.266,00  |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
|                                                                                                                                                                     | <div>Starlight</div><br>MS-C5367-X23PE<br>(1/2.8")                     | <b>5MP</b><br>2592*1944<br>@30fps     | 23X<br>AF Lens<br>5~117mm   | H55°~H3°<br>D68°~D4°<br>V42°~V2° | Color: 0.008Lux<br>@F1.5 | 120dB | 180m        | IP66         | 1.314,00  | Optional:<br>* Junction Box A62                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
|                                                                                                                                                                     | <div>4K</div><br>MS-C8267-X20PE<br>(1/1.8")                            | <b>8MP(4K)</b><br>3840*2160<br>@30fps | 20X<br>AF Lens<br>6.4~128mm | H60°~H3°<br>D67°~D4°<br>V37°~V1° | Color: 0.009Lux<br>@F1.6 | 120dB | 180m        | IP66         | 2.126,00  |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |

| AI 12X/20X/23X PTZ Dome Network Camera                                             |                                                                                                                                                                                                                |                                       |                               |                                            |                           |       |             |                |           |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
|------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------|-------------------------------|--------------------------------------------|---------------------------|-------|-------------|----------------|-----------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Picture                                                                            | Model                                                                                                                                                                                                          | Resolution                            | Lens                          | Field of View                              | Ultra Low-light           | WDR   | IR Distance | IP&IK Rating   | Listino € | Features                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
|    | <br>MS-C2971-X12RPE<br>(1/2.8")                                                                                               | <b>2MP</b><br>1920*1080<br>@60fps     | 12X<br>AF Lens<br>5.3~64mm    | H61°~H5°<br>D69°~D5°<br>V36°~V2°           | Color: 0.005Lux<br>@F1.6  | 140dB | 160m        | IP66<br>IK10   | 1.243,00  | * Support PoE; SD card, up to 1TB, 4KV Surge Protection<br>* Support H.265 + /H.265/H.264 + /H.264<br>* 12X/20X/23X optical zoom, PTZ Position Display, 3D positioning,<br>* 300 Preset Points, 8 Patrols, up to 48 presets each patrol; 4 Patterns<br>* 360° endless Pan,Pan Manual Speed: 0.1°~350°/s, Preset Speed: 350°/s<br>* -5°~90° Tilt, Tilt Manual Speed: 0.1°~360°/s, Preset Speed: 360°/s<br>* Multi Port: Alarm I/O, Audio I/O, DC 12V<br>* AI Based Video Content Analysis, Object Counting (Crossing Line People/Vehicle, Regional People), Face Detection                                                                                                          |
|                                                                                    | <br>MS-C2971-X23RPE<br>(1/2.8")                                                                                               | <b>2MP</b><br>1920*1080<br>@60fps     | 23X<br>AF Lens<br>5~117mm     | H60°~H3°<br>D69°~D4°<br>V35°~V2°           | Color: 0.005Lux<br>@F1.5  | 140dB | 160m        | IP66<br>IK10   | 1.314,00  |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
|                                                                                    | <br>MS-C5371-X12PE<br>(1/2.8")                                                                                                | <b>5MP</b><br>2592*1944<br>@30fps     | 12X<br>AF Lens<br>5.3~64mm    | H57°~H4°<br>D69°~D5°<br>V44°~V1°           | Color: 0.008Lux<br>@F1.6  | 120dB | 160m        | IP66<br>IK10   | 1.290,00  |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
|                                                                                    |                                                                                                                                                                                                                |                                       |                               |                                            |                           |       |             |                |           |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| AI 25X/30X/36X/42X Speed Dome Network Camera                                       |                                                                                                                                                                                                                |                                       |                               |                                            |                           |       |             |                |           |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| Picture                                                                            | Model                                                                                                                                                                                                          | Resolution                            | Lens                          | Field of View                              | Ultra Low-light           | WDR   | IR Distance | IP&IK Rating   | Listino € | Features                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
|    | <br>MS-C4441-X36RPE<br>(1/1.8")                                                                                               | <b>4MP</b><br>2688*1520<br>@60fps     | 36X<br>AF Lens<br>5~205.3mm   | H62°~H3°<br>D70°~D3°<br>V37°~V1°           | Color: 0.008Lux<br>@F1.55 | 120dB | 300m        | IP66<br>(IK10) | 3.048,00  | * Support PoE; SD card, up to 1TB, 6KV Surge Protection, Heater<br>* Support H.265 + /H.265/H.264 + /H.264<br>* 25X/30X/36X/42X Optical Zoom; PTZ Position Display, 3D positioning,<br>* 300 Preset Points, 8 Patrols, up to 48 presets each patrol; 4 Patterns<br>* 360°endless / Pan Manual Speed: 0.1°~250°/s, Pan Preset Speed: 250°/s<br>* -5°~90°(Auto Flip) / Tilt Manual Speed: 0.1°~160°/s, Tilt Preset Speed: 160°/s<br>* Multi port: RS485, Alarm I/O*4/2, Audio I/O, AC 24V<br>* Video Content Analysis, Object Counting (Crossing Line People/Vehicle, Regional People), Face Detection, Vehicle Counting<br>* Wall Mount Bracket A41 (Default)                       |
|                                                                                    | <br>MS-C5341-X25PE<br>(1/2.8")                                                                                                | <b>5MP</b><br>2592*1944<br>@30fps     | 25X<br>AF Lens<br>4.8~120mm   | H57°~H2.8°<br>D69.8°~D3.6°<br>V43.8°~V1.8° | Color: 0.008Lux<br>@F1.5  | 120dB | 200m        | IP66<br>(IK10) | 1.555,00  |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
|                                                                                    | <br>MS-C5341-X30PE<br>(1/2.8")                                                                                                | <b>5MP</b><br>2592*1944<br>@30fps     | 30X<br>AF Lens<br>4.7~141mm   | H58°~H3°<br>D71°~D3°<br>V44°~V2°           | Color: 0.008Lux<br>@F1.5  | 120dB | 200m        | IP66<br>(IK10) | 2.055,00  |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
|                                                                                    | <br>MS-C5341-X42PE<br>(1/2.8")                                                                                                | <b>5MP</b><br>2592*1944<br>@30fps     | 42X<br>AF Lens<br>7~300mm     | H43°~H2°<br>D53°~D2°<br>V33°~V1°           | Color: 0.008Lux<br>@F1.8  | 120dB | 300m        | IP66<br>(IK10) | 4.361,00  |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
|                                                                                    | <br>MS-C8241-X36PE<br>(1/1.8")                                                                                               | <b>8MP(4K)</b><br>3840*2160<br>@30fps | 36X<br>AF Lens<br>5.7~205.2mm | H66°~H3°<br>D72°~D3°<br>V41°~V1°           | Color: 0.009Lux<br>@F1.55 | 120dB | 300m        | IP66<br>(IK10) | 3.270,00  |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
|                                                                                    |                                                                                                                                                                                                                |                                       |                               |                                            |                           |       |             |                |           |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| AI 30X/36X/42X Wiper Speed Dome Network Camera                                     |                                                                                                                                                                                                                |                                       |                               |                                            |                           |       |             |                |           |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| Picture                                                                            | Model                                                                                                                                                                                                          | Resolution                            | Lens                          | Field of View                              | Ultra Low-light           | WDR   | IR Distance | IP&IK Rating   | Listino € | Features                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
|  | <br><br>MS-C4441-X36RPE<br>/W<br>(1/1.8") | <b>4MP</b><br>2688*1520<br>@60fps     | 36X<br>AF Lens<br>5~205.3mm   | H62°~H3°<br>D70°~D3°<br>V37°~V1°           | Color: 0.008Lux<br>@F1.55 | 120dB | 300m        | IP66           | 3.577,00  | * Smart Rain-sensing Wiper<br>* Support PoE; SD card, up to 1TB, 6KV Surge Protection, Heater<br>* Support H.265 + /H.265/H.264 + /H.264<br>* 30X/36X/42X Optical Zoom; PTZ Position Display, 3D positioning, 300 Preset Points, 8 Patrols, up to 48 presets each patrol; 4 Patterns<br>* 360°endless / Pan Manual Speed: 0.1°~250°/s, Pan Preset Speed: 250°/s<br>* -5°~90°(Auto Flip) / Tilt Manual Speed: 0.1°~160°/s, Tilt Preset Speed: 160°/s<br>* Multi port: RS485, Alarm I/O *4/2, Audio I/O, AC 24V<br>* Video Content Analysis, Object Counting (Crossing Line People/Vehicle, Regional People), Face Detection, Vehicle Counting<br>* Wall Mount Bracket A41 (Default) |
|                                                                                    | <br>MS-C5341-X30PE<br>/W<br>(1/2.8")                                                                                        | <b>5MP</b><br>2592*1944<br>@30fps     | 30X<br>AF Lens<br>4.7~141mm   | H58°~H3°<br>D71°~D3°<br>V44°~V2°           | Color: 0.008Lux<br>@F1.5  | 120dB | 300m        | IP66           | 2.796,00  |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
|                                                                                    | <br>MS-C5341-X42PE<br>/W<br>(1/2.8")                                                                                        | <b>5MP</b><br>2592*1944<br>@30fps     | 42X<br>AF Lens<br>7~300mm     | H43°~H2°<br>D53°~D2°<br>V33°~V1°           | Color: 0.008Lux<br>@F1.8  | 120dB | 300m        | IP66           | 4.990,00  |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
|                                                                                    | <br>MS-C8241-X36PE<br>/W<br>(1/1.8")                                                                                        | <b>8MP(4K)</b><br>3840*2160<br>@30fps | 36X<br>AF Lens<br>5.7~205.2mm | H66°~H3°<br>D72°~D3°<br>V41°~V1°           | Color: 0.009Lux<br>@F1.55 | 120dB | 300m        | IP66           | 3.811,00  |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |

5G AIoT Series

| AIoT 12X Pro Bullet Plus Network Camera                                            |                                                                           |                             |                              |                                       |                       |       |             |              |           |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
|------------------------------------------------------------------------------------|---------------------------------------------------------------------------|-----------------------------|------------------------------|---------------------------------------|-----------------------|-------|-------------|--------------|-----------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Picture                                                                            | Model                                                                     | Resolution                  | Lens                         | Field of View                         | Ultra Low-light       | WDR   | IR Distance | IP&IK Rating | Listino € | Features                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
|    | <div>StarlightSuper Wide</div> <div>MS-C2966-X12ROPC-915M (1/2.8")</div>  | 2MP<br>1920*1080 @60fps     | 12X<br>AF Lens<br>5.3~64mm   | H61°~H5°<br>D69°~D5°<br>V36°~V2°      | Color: 0.005Lux @F1.6 | 140dB | 180m        | IP67         | 989,00    | <ul style="list-style-type: none"><li>* Built-in LoRaWAN® Gateway</li><li>* Support Connection with more than 2000 LoRaWAN® Sensors / Nodes from 8 End-Devices Simultaneously</li><li>* High Capacity, High Compatibility, Embedded Network Server</li><li>* Supprt IoT, PoE, SD card, up to 256G; 3-Axis Design</li><li>* Support H.265 + /H.265/H.264 + /H.264</li><li>* Integrated Cable Management</li><li>* Multi port: Alarm I/O, Audio I/O, DC 12V</li><li>* Video Content Analysis, People Counting, Face Detection, Heat Map</li><li>* IP67 Only for Camera Body</li></ul>                                           |
| 5G AI Motorized Pro Bullet Plus Network Camera                                     |                                                                           |                             |                              |                                       |                       |       |             |              |           |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| Picture                                                                            | Model                                                                     | Resolution                  | Lens                         | Field of View                         | Ultra Low-light       | WDR   | IR Distance | IP&IK Rating | Listino € | Features                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
|    | <div>StarlightSuper Wide</div> <div>MS-C2966-RFGPE (1/2.8")</div>         | 2MP<br>1920*1080 @60fps     | Motorized Lens<br>2.7~13.5mm | H113°~H33°<br>D130°~D38°<br>V60°~V18° | Color: 0.005Lux @F1.4 | 140dB | 65m         | IP67         | 1.852,00  | <ul style="list-style-type: none"><li>* Supprt 5G/4G/3G,P2P, Nano SIM</li><li>* Support PoE, SD card, up to 1TB; 3-Axis Design</li><li>* Support H.265 + /H.265/H.264 + /H.264</li><li>* Integrated Cable Management</li><li>* Multi port: Alarm I/O, Audio I/O, DC 12V</li><li>* Video Content Analysis, Object Counting (Crossing Line People/Vehicle, Regional People), Face Detection, Heat Map</li><li>* IP67 Only for Camera Body</li></ul>                                                                                                                                                                             |
|    | <div>4K</div> <div>MS-C8266-FGPE (1/2.8")</div>                           | 8MP(4K)<br>3840x2160 @30fps | Motorized Lens<br>3.6~10mm   | H116°~H48°<br>D134°~D55°<br>V65°~V27° | Color: 0.009Lux @F1.4 | 120dB | 65m         | IP67         | 2.065,00  | <ul style="list-style-type: none"><li>* Supprt 5G/4G/3G,P2P, Nano SIM</li><li>* Support PoE, SD card, up to 1TB; 3-Axis Design</li><li>* Support H.265 + /H.265/H.264 + /H.264</li><li>* Integrated Cable Management</li><li>* Multi port: Alarm I/O, Audio I/O, DC 12V</li><li>* Video Content Analysis, Object Counting (Crossing Line People/Vehicle, Regional People), Face Detection, Heat Map</li><li>* IP67 Only for Camera Body</li></ul>                                                                                                                                                                             |
| 5G AI 4X/12X Pro Bullet Plus Network Camera                                        |                                                                           |                             |                              |                                       |                       |       |             |              |           |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| Picture                                                                            | Model                                                                     | Resolution                  | Lens                         | Field of View                         | Ultra Low-light       | WDR   | IR Distance | IP&IK Rating | Listino € | Features                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
|    | <div>StarlightSuper Wide</div> <div>MS-C2966-X12RGPE (1/2.8")</div>       | 2MP<br>1920*1080 @60fps     | 12X<br>AF Lens<br>5.3~64mm   | H61°~H5°<br>D69°~D5°<br>V36°~V2°      | Color: 0.005Lux @F1.6 | 140dB | 180m        | IP67         | 1.999,00  | <ul style="list-style-type: none"><li>* Supprt 5G/4G/3G,P2P, Nano SIM</li><li>* Support PoE, SD card, up to 1TB; 3-Axis Design</li><li>* Support H.265 + /H.265/H.264 + /H.264</li><li>* Integrated Cable Management</li><li>* Multi port: Alarm I/O, Audio I/O, DC 12V</li><li>* Video Content Analysis, Object Counting (Crossing Line People/Vehicle, Regional People), Face Detection, Heat Map</li><li>* IP67 Only for Camera Body</li></ul>                                                                                                                                                                             |
|    | <div>4K</div> <div>MS-C5366-FGPC (1/1.8")</div>                           | 5MP<br>2592*1944 @30fps     | Motorized Lens<br>2.7~13.5mm | H44°~H13°<br>D51°~D15°<br>V25°~V7°    | Color: 0.009Lux @F1.6 | 120dB | 65m         | IP67         | 1.923,00  | <ul style="list-style-type: none"><li>* Supprt 5G/4G/3G,P2P, Nano SIM</li><li>* Support PoE, SD card, up to 1TB; 3-Axis Design</li><li>* Support H.265 + /H.265/H.264 + /H.264</li><li>* Integrated Cable Management</li><li>* Multi port: Alarm I/O, Audio I/O, DC 12V</li><li>* Video Content Analysis, Object Counting (Crossing Line People/Vehicle, Regional People), Face Detection, Heat Map</li><li>* IP67 Only for Camera Body</li></ul>                                                                                                                                                                             |
| 5G AIoT 4X/12X Pro Bullet Plus Network Camera                                      |                                                                           |                             |                              |                                       |                       |       |             |              |           |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| Picture                                                                            | Model                                                                     | Resolution                  | Lens                         | Field of View                         | Ultra Low-light       | WDR   | IR Distance | IP&IK Rating | Listino € | Features                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
|  | <div>StarlightSuper Wide</div> <div>MS-C2966-X12RGOPC-915M (1/2.8")</div> | 2MP<br>1920*1080 @60fps     | 12X<br>AF Lens<br>5.3~64mm   | H61°~H5°<br>D69°~D5°<br>V36°~V2°      | Color: 0.005Lux @F1.6 | 140dB | 180m        | IP67         | 2.269,00  | <ul style="list-style-type: none"><li>* Built-in LoRaWAN® Gateway</li><li>* Support Connection with more than 2000 LoRaWAN® Sensors / Nodes from 8 End-Devices Simultaneously</li><li>* High Capacity, High Compatibility, Embedded Network Server</li><li>* Supprt IoT, 5G/4G/3G, P2P, Nano SIM</li><li>* Support PoE, SD card, up to 256G; 3-Axis Design</li><li>* Support H.265 + /H.265/H.264 + /H.264</li><li>* Integrated Cable Management</li><li>* Multi port: Alarm I/O, Audio I/O, DC 12V</li><li>* Video Content Analysis, People Counting, Face Detection, Heat Map</li><li>* IP67 Only for Camera Body</li></ul> |

\* "-915M" / "-868M" / "-470M" under the model refers to different LoRaWAN Frequency in option for different countries / regions, (e.g.)  
\* "-915M": KR920 / AS923 / AU915 / US915-4.28dBi ; "-868M": IN865 / EU868 / RU864-4.52dBi; "-470M": CN470-0.87dBi

| TELECAMERE LETTURA TARGHE                                                          |                                             |                                                         |                                       |                                           |       |                     |                                         |             |            |                                                                                                                                                                                                                                                      |
|------------------------------------------------------------------------------------|---------------------------------------------|---------------------------------------------------------|---------------------------------------|-------------------------------------------|-------|---------------------|-----------------------------------------|-------------|------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Immagine                                                                           | Modello                                     | Ottica                                                  | Field of View                         | Ultra Low-light                           | WDR   | ANPR Distance (Day) | ANPR Distance (Night with Illumination) | IR Distance | Listino €  | Caratteristiche                                                                                                                                                                                                                                      |
|  | <div>Stock</div> <div>MS-C2964-RFLPE</div>  | Motorized lens<br>2.7~13.5mm<br>2MP<br>1920*1080 @60fps | H111°~H34°<br>D130°~D39°<br>V60°~V19° | Color: 0.005Lux @F1.4                     | 140dB | 25m                 | 20m                                     | Up to 50m   | 1.389,00 € | <ul style="list-style-type: none"><li>* Support SD card, up to 256G; 3-Axis Design</li><li>* Multi Port: Alarm I/O*1+Audio I/O*1+DC 12V+PoE</li><li>* IP&amp;IK Rating: IP67 - IK10</li></ul>                                                        |
|  | MIL-MS-A63                                  | STAFFA DA PARETE BULLET MINI                            |                                       |                                           |       |                     |                                         |             | 47,00 €    |                                                                                                                                                                                                                                                      |
|  | <div>Stock</div> <div>TS2966-X12TPE</div>   | 12X AF Lens<br>5.3~64mm<br>1920*1080 @90fps             | H61°~H5°<br>D69°~D5°<br>V36°~V2°      | Color: 0.005Lux @F1.6                     | 140dB | 70m                 | 35m                                     | Up to 180m  | 1.975,00 € | <ul style="list-style-type: none"><li>* Support SD card, up to 256G; 3-Axis Design</li><li>* Multi-Port: RS485+Alarm I/O*1+Audio I/O*1+DC 12V +PoE</li><li>* Integrated Cable Management (Default)</li><li>* IP&amp;IK Rating: IP67 - IK10</li></ul> |
|  | <div>Stock</div> <div>MS-C2866-X4TLPA</div> | 4X AF Lens<br>8~32mm<br>1920*1080 @90fps                | H44°~H13°<br>D51°~D15°<br>V25°~V7°    | Color: 0.002Lux@F1.6 B/W: 0Lux with IR on | 120Db | 60m                 | 30m                                     | Up to 180m  | 1.914,00 € |                                                                                                                                                                                                                                                      |

PoE NVR Series

| 4K H.265 + Mini PoE NVR 1000 Series                                              |                                         |                         |                                     |           |                     |               |     |           |           |                                                                                                                                                 |
|----------------------------------------------------------------------------------|-----------------------------------------|-------------------------|-------------------------------------|-----------|---------------------|---------------|-----|-----------|-----------|-------------------------------------------------------------------------------------------------------------------------------------------------|
| Picture                                                                          | Model                                   | Bandwidth               | Synchronous playback                | PoE Ports | HDD Support         | Local display |     | Alarm I/O | Listino € | Features                                                                                                                                        |
|                                                                                  |                                         |                         |                                     |           |                     | HDMI          | VGA |           |           |                                                                                                                                                 |
|  | <div>PoE</div> <div>MS-N1004-UPC</div>  | In:40Mbps<br>Out:40Mbps | 1*8MP<br>1*5MP<br>4*1080P<br>4*720P | 4         | 1*10TB<br>(3.5"HDD) | ✓             | N/A | N/A       | 383,00    | 1*RJ45 10/100Mbps<br>2*USB2.0 Interfaces<br>220mm(W)×200mm(D)×43.6mm(H)<br>AI based Video Content Analysis, PoS Intergration, Auto Backup       |
|                                                                                  | <div>PoE</div> <div>MS-N1008-UPC</div>  | In:80Mbps<br>Out:80Mbps | 1*8MP<br>1*5MP<br>4*1080P<br>8*720P | 4         | 1*10TB<br>(3.5"HDD) | ✓             | N/A | N/A       | 383,00    |                                                                                                                                                 |
|  | <div>PoE</div> <div>MS-N1008-UNPC</div> | In:80Mbps<br>Out:80Mbps | 1*8MP<br>1*5MP<br>4*1080P<br>8*720P | 4         | 1*10TB<br>(3.5"HDD) | ✓             | N/A | N/A       | 510,00    | 1*RJ45 100/1000Mbps<br>2*USB2.0 Interfaces<br>115mm(W)X115mm(D)X180mm(H)<br>AI based Video Content Analysis, ANR, PoS Intergration, Auto Backup |

| 4K H.265 + PoE NVR 5000 Series (NDAA)                                             |                                        |                           |                                       |           |                     |               |     |           |           |                                                                                                      |
|-----------------------------------------------------------------------------------|----------------------------------------|---------------------------|---------------------------------------|-----------|---------------------|---------------|-----|-----------|-----------|------------------------------------------------------------------------------------------------------|
| Picture                                                                           | Model                                  | Bandwidth                 | Synchronous playback                  | PoE Ports | HDD Support         | Local display |     | Alarm I/O | Listino € | Features                                                                                             |
|                                                                                   |                                        |                           |                                       |           |                     | HDMI          | VGA |           |           |                                                                                                      |
|   | <div>PoE</div> <div>MS-N5008-PE</div>  | In:80Mbps<br>Out:50Mbps   | 1*8MP<br>2*5MP<br>6*1080P<br>8*720P   | 8         | 2*10TB<br>(3.5"HDD) | ✓             | ✓   | 4/1       | 695,00    | 1*RJ45 100/1000Mbps<br>2*USB 2.0 Interfaces<br>1*RCA Audio Input + 1*RCA Audio Output                |
|  | <div>PoE</div> <div>MS-N5016-NPE</div> | In:160Mbps<br>Out:160Mbps | 3*8MP<br>4*5MP<br>12*1080P<br>16*720P | 16        | 2*10TB<br>(3.5"HDD) | ✓             | ✓   | 4/1       | 988,00    | AI Based Video Content Analysis, Face Detection, ANR, PoS Intergration, ANPR Management, Auto Backup |

| 4K H.265 + PoE NVR 7000 Series                                                     |                                        |                           |                                       |           |                     |               |     |           |           |                                                                                                                                                                        |
|------------------------------------------------------------------------------------|----------------------------------------|---------------------------|---------------------------------------|-----------|---------------------|---------------|-----|-----------|-----------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Picture                                                                            | Model                                  | Bandwidth                 | Synchronous playback                  | PoE Ports | HDD Support         | Local display |     | Alarm I/O | Listino € | Features                                                                                                                                                               |
|                                                                                    |                                        |                           |                                       |           |                     | HDMI          | VGA |           |           |                                                                                                                                                                        |
|  | <div>PoE</div> <div>MS-N7016-PG</div>  | In:160Mbps<br>Out:160Mbps | 6*8MP<br>8*6MP<br>12*4MP<br>16*1080P  | 16        | 4*10TB<br>(3.5"HDD) | ✓             | ✓   | 16/4      | 1.611,00  | 1*RJ45 100/1000Mbps<br>1*RCA Audio Input + 1*RCA Audio Output<br>1*RS-485 Series Port for PTZ<br>1*RS-232 Series Port for Console<br>1*RS-485 Series Port for Keyboard |
|                                                                                    | <div>PoE</div> <div>MS-N7032-UPH</div> | In:256Mbps<br>Out:256Mbps | 4*8MP<br>6*5MP<br>16*1080P<br>32*720P | 24        | 4*10TB<br>(3.5"HDD) | ✓             | ✓   | 16/4      | 1.611,00  | 1*USB 3.0 Interfaces + 2*USB 2.0 Interfaces<br>* N+1 Hot Spare<br>RAID 0/1/5/6/10 Storage                                                                              |
|                                                                                    | <div>PoE</div> <div>MS-N7048-UPH</div> | In:320Mbps<br>Out:256Mbps | 4*8MP<br>6*5MP<br>16*1080P<br>32*720P | 24        | 4*10TB<br>(3.5"HDD) | ✓             | ✓   | 16/4      | 1.966,00  | AI based Video Content Analysis,Face Detection, ANR, PoS Intergration, ANPR Management, Auto Backup                                                                    |

NVR Series

| 4K H.265 + Mini NVR 1000 Series                                                    |                         |                         |                                     |      |                     |               |     |             |           |                                                                                                                                                                                                                  |
|------------------------------------------------------------------------------------|-------------------------|-------------------------|-------------------------------------|------|---------------------|---------------|-----|-------------|-----------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Picture                                                                            | Model                   | Bandwidth               | Synchronous playback                | RAID | HDD Support         | Local display |     | Audio Alarm | Listino € | Features                                                                                                                                                                                                         |
|                                                                                    |                         |                         |                                     |      |                     | HDMI          | VGA |             |           |                                                                                                                                                                                                                  |
|  | MS-N1004-UC             | In:40Mbps<br>Out:40Mbps | 1*8MP<br>1*5MP<br>4*1080P<br>4*720P | N/A  | 1*10TB<br>(3.5"HDD) | ✓             | N/A | N/A         | 289,00    | 1*RJ45 10/100Mbps<br>2*USB 2.0 Interfaces<br>1*SATA HDD(3.5") support<br>220mm(W)×220mm(D)×143.6mm(H)<br>AI based Video Content Analysis, ANR, PoS Intergration, Auto Backup                                     |
|                                                                                    | <div>MS-N1008-UC</div>  | In:80Mbps<br>Out:80Mbps | 1*8MP<br>1*5MP<br>4*1080P<br>8*720P | N/A  | 1*10TB<br>(3.5"HDD) | ✓             | N/A | N/A         | 289,00    |                                                                                                                                                                                                                  |
|  | <div>MS-N1008-UNC</div> | In:80Mbps<br>Out:80Mbps | 1*8MP<br>1*5MP<br>4*1080P<br>8*720P | N/A  | 2*2TB<br>(2.5"HDD)  | ✓             | N/A | N/A         | 359,00    | 1*RJ45 100/1000Mbps<br>2*USB 2.0 Interfaces<br>80mm(W)X80mm(D)X120mm(H)<br>AI based Video Content Analysis, ANR, PoS Intergration, Auto Backup<br><br>Optional:<br>Black/Gold/Silver Color<br>2*2.5"HDD Support: |

| 4K H.265 + Pro NVR 5000 Series (NDAA)                                              |             |                                                  |                                       |            |                                       |        |       |           |                                                                                                                                                                                                                                                                                                                                                                                                               |                                                                                                                                                                                             |
|------------------------------------------------------------------------------------|-------------|--------------------------------------------------|---------------------------------------|------------|---------------------------------------|--------|-------|-----------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Picture                                                                            | Model       | Bandwidth                                        | Synchronous playback                  | RAID       | HDD Support                           |        |       | Alarm I/O | Listino €                                                                                                                                                                                                                                                                                                                                                                                                     | Features                                                                                                                                                                                    |
|                                                                                    |             |                                                  |                                       |            |                                       | HDMI   | VGA   |           |                                                                                                                                                                                                                                                                                                                                                                                                               |                                                                                                                                                                                             |
|    | MS-N5008-NE | In:160Mbps<br>Out:160Mbps                        | 3*8MP<br>4*5MP<br>8*1080P<br>8*720P   | N/A        | 2*10TB<br>(3.5"HDD)                   | ✓      | ✓     | 4/1       | 506,00                                                                                                                                                                                                                                                                                                                                                                                                        | 1*RJ45 100/1000Mbps<br>2*USB 2.0 Interfaces                                                                                                                                                 |
|    | MS-N5016-NE | In:160Mbps<br>Out:160Mbps                        | 3*8MP<br>4*5MP<br>12*1080P<br>16*720P | N/A        | 2*10TB<br>(3.5"HDD)                   | ✓      | ✓     | 4/1       | 569,00                                                                                                                                                                                                                                                                                                                                                                                                        | 1*RCA Audio Input + 1*RCA Audio Output<br>AI Based Video Content Analysis, Face Detection, ANR, PoS Intergration, ANPR Management, Auto Backup                                              |
| 4K H.265 + Pro NVR 7000 Series                                                     |             |                                                  |                                       |            |                                       |        |       |           |                                                                                                                                                                                                                                                                                                                                                                                                               |                                                                                                                                                                                             |
| Picture                                                                            | Model       | Bandwidth                                        | Synchronous playback                  | RAID       | HDD Support                           |        |       | Alarm I/O | Listino €                                                                                                                                                                                                                                                                                                                                                                                                     | Features                                                                                                                                                                                    |
|                                                                                    |             |                                                  |                                       |            |                                       |        |       |           |                                                                                                                                                                                                                                                                                                                                                                                                               |                                                                                                                                                                                             |
|    | MS-N7016-G  | In:160Mbps<br>Out:160Mbps                        | 6*8MP<br>9*5MP<br>16*1080P<br>16*720P | 0/1/5/6/10 | 4*10TB<br>(3.5"HDD)                   | ✓      | ✓     | 16/4      | 1.271,00                                                                                                                                                                                                                                                                                                                                                                                                      | 2*RJ45 100/1000Mbps<br>1*RCA Audio Input + 1*RCA Audio Output<br>1*RS-485 Series Port for PTZ<br>1*RS-232 Series Port for Console<br>1*RS-485 Series Port for Keyboard                      |
|                                                                                    | MS-N7032-G  | In:256Mbps<br>Out:256Mbps                        | 6*8MP<br>9*5MP<br>24*1080P<br>32*720P | 0/1/5/6/10 | 4*10TB<br>(3.5"HDD)                   | ✓      | ✓     | 16/4      | 1.499,00                                                                                                                                                                                                                                                                                                                                                                                                      | 1*USB 3.0 Interfaces + 2*USB 2.0 Interfaces<br>AI based Video Content Analysis, Face Detection, ANR, PoS Intergration, ANPR Management, N+1 Hot Space, Auto Backup                          |
| 4K H.265 + Pro NVR 8000 Series                                                     |             |                                                  |                                       |            |                                       |        |       |           |                                                                                                                                                                                                                                                                                                                                                                                                               |                                                                                                                                                                                             |
| Picture                                                                            | Model       | Bandwidth                                        | Synchronous playback                  | RAID       | HDD Support                           |        |       | Alarm I/O | Listino €                                                                                                                                                                                                                                                                                                                                                                                                     | Features                                                                                                                                                                                    |
|                                                                                    |             |                                                  |                                       |            |                                       |        |       |           |                                                                                                                                                                                                                                                                                                                                                                                                               |                                                                                                                                                                                             |
|    | MS-N8032-G  | In:256Mbps<br>Out:256Mbps                        | 6*8MP<br>9*5MP<br>24*1080P<br>32*720P | 0/1/5/6/10 | 8*10TB<br>(3.5"HDD)                   | 2*HDMI | 2*VGA | 16/4      | 1.701,00                                                                                                                                                                                                                                                                                                                                                                                                      | 2*RJ45 100/1000Mbps<br>1*RCA Audio Input + 2*RCA Audio Output<br>1*eSATA Interface<br>1*RS-485 Series Port for PTZ<br>1*RS-232 Series Port for Console<br>1*RS-485 Series Port for Keyboard |
|                                                                                    | MS-N8064-G  | In:320Mbps<br>Out:256Mbps                        | 6*8MP<br>9*5MP<br>24*1080P<br>48*720P | 0/1/5/6/10 | 8*10TB<br>(3.5"HDD)                   | 2*HDMI | 2*VGA | 16/4      | 2.290,00                                                                                                                                                                                                                                                                                                                                                                                                      | 1*USB 3.0 Interfaces + 2*USB 2.0 Interfaces<br>AI based Video Content Analysis, Face Detection, ANR, PoS Intergration, ANPR Management, N+1 Hot Space, Auto Backup                          |
| Enterprise NVR 1U Series(NDAA)                                                     |             |                                                  |                                       |            |                                       |        |       |           |                                                                                                                                                                                                                                                                                                                                                                                                               |                                                                                                                                                                                             |
| Picture                                                                            | Model       | Description                                      |                                       |            | Included Camera Access License        |        |       | Listino € | Features                                                                                                                                                                                                                                                                                                                                                                                                      |                                                                                                                                                                                             |
|  | VE0100-A    | Enterprise NVR with 8-CH License, 1 Disk Slots.  |                                       |            | * Support 8 video streams per server  |        |       | 1.172,00  | * Integrate with Milesight network cameras, sensors and 3rd party network cameras<br>* Support expandable disk capacity of 1*20TB or 2*20TB<br>* Pre-loaded with Milesight VMS Server & Client                                                                                                                                                                                                                |                                                                                                                                                                                             |
|                                                                                    | VE0201-A    | Enterprise NVR with 16-CH License, 2 Disk Slots. |                                       |            | * Support 16 video streams per server |        |       | 1.234,00  | * N+M Failover ensures data security<br>* Windows-based operating system<br>* 2*HDMI Port+1*DP Port(Support independent and synchronous display)<br>* Rear panel: 2*USB 2.0, 2*USB 3.0, 1*USB-C Port<br>* AC 100-240V, 50-60Hz, DC 12V                                                                                                                                                                        |                                                                                                                                                                                             |
| Enterprise NVR 2U Series(NDAA)                                                     |             |                                                  |                                       |            |                                       |        |       |           |                                                                                                                                                                                                                                                                                                                                                                                                               |                                                                                                                                                                                             |
| Picture                                                                            | Model       | Description                                      |                                       |            | Included Camera Access License        |        |       | Listino € | Features                                                                                                                                                                                                                                                                                                                                                                                                      |                                                                                                                                                                                             |
|  | VE0601-A    | Enterprise NVR with 16-CH License, 6 Disk Slots. |                                       |            | * Support 16 video streams per server |        |       | 1.560,00  | * Integrate with Milesight network cameras, sensors and 3rd party network cameras<br>* Support up to 6*20TB storage and expandable storage capacity<br>* Pre-loaded with Milesight VMS Server & Client<br>* Central Management for single and multiple sites<br>* N+M Failover ensures data security<br>* Windows-based operating system                                                                      |                                                                                                                                                                                             |
|                                                                                    | VE0602-A    | Enterprise NVR with 32-CH License, 6 Disk Slots. |                                       |            | * Support 32 video streams per server |        |       | 2.174,00  | * 1*PCI-E4 slot;<br>* 2*SO-DIMM DDR4 2666 Slot (2*4GB /2*8GB Pre-installed)<br>* 1*HDMI Port+1*DP Port(Support independent and synchronous display)<br>* 1*Power Connector(ATX_PWR 24pin) + 1*Power Connector (CPU_PWR 4pin)<br>+1*CPU Fan+1*COM Connector (9pin) +1*Front Panel Connector<br>* 1* HD Audio Connector<br>* Front panel: 2*USB 2.0 +Rear panel: 2*USB 2.0, 2*USB 3.0<br>* AC 100-240V, 50-60Hz |                                                                                                                                                                                             |

| Enterprise NVR 3U Series (NDAA)                                                  |          |                                                    |                                        |           |                                                                                                                                                                                                                                                                                                                                                 |  |  |  |  |  |
|----------------------------------------------------------------------------------|----------|----------------------------------------------------|----------------------------------------|-----------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|--|--|--|--|
| Picture                                                                          | Model    | Description                                        | Included Camera Access License         | Listino € | Features                                                                                                                                                                                                                                                                                                                                        |  |  |  |  |  |
|  | VE1604-A | Enterprise NVR with 64-CH License, 16 Disk Slots.  | * Support 64 video streams per server  | 9.828,00  | * Integrate with Milesight network cameras, sensors and 3rd party network cameras<br>* Support up to 16*20TB storage and expandable storage capacity<br>* Pre-loaded with Milesight VMS Server & Client<br>* Central Management for single and multiple sites<br>* N+M Failover ensures data security<br>* Windows-based operating system       |  |  |  |  |  |
|                                                                                  | VE1608-A | Enterprise NVR with 128-CH License, 16 Disk Slots. | * Support 128 video streams per server | 12.191,00 | * Support RAID 0, 1, 5, 6, 10, 50,60<br>* Support 1*2.5Gbps, 2*100Mbps LAN port<br>* 4* DDR4 Slot(2*8GB Pre-installed)<br>* 2*HDMI Port, 1*DP Port(Support independent and synchronous display)<br>* 1* BNC In + 1*BNC Out<br>* Front panel: 2*USB 3.0 + Rear panel: 4*USB 2.0+2*USB 3.2 Gen2<br>* AC 100-240V, 50-60Hz, redundant power supply |  |  |  |  |  |

Keyboard Series



| Network Keyboard                                                                 |        |                          |                 |              |             |             |       |      |           |                                                                                                                                                   |
|----------------------------------------------------------------------------------|--------|--------------------------|-----------------|--------------|-------------|-------------|-------|------|-----------|---------------------------------------------------------------------------------------------------------------------------------------------------|
| Picture                                                                          | Model  | LCD Screen               | Joystick        | Control Mode | PTZ Control | NVR Control | RS232 | RJ45 | Listino € | Featuress                                                                                                                                         |
|  | MS-K01 | 58x44 (2.8") Blue Screen | 4-axis joystick | IP-based     | √           | r           | √     | √    | 1.509,00  | Support Milesight NVR + PTZ Camera<br>Support PoE & DC12V, Built-in Web Server<br>Up to 110 Devices Control<br>1 * RJ45 100/1000Mbps<br>1 * RS232 |

PoE Switch Series

| PoE Switch                                                                         |             |                      |              |             |                |             |                    |             |           |                                                                                                        |
|------------------------------------------------------------------------------------|-------------|----------------------|--------------|-------------|----------------|-------------|--------------------|-------------|-----------|--------------------------------------------------------------------------------------------------------|
| Picture                                                                            | Model       | Ports                |              |             | Max. PoE Power |             | Switching Capacity | Extend Mode | Listino € | Features                                                                                               |
|                                                                                    |             | PoE Ports            | Uplink Ports | SFP Ports   | Max Capacity   | Single Port |                    |             |           |                                                                                                        |
|    | MS-S0204-EL | Stock 4X10/100 Mbps  | 2X100 Mbps   | N/A         | 60W            | 30W         | 1.6 Gbps           | √           | 109,00    | * PoE Standard: IEEE802.3 af/at<br>* Port Lightning Protection: 4KV 8/20us<br>* Protection Level: IP30 |
|    | MS-S0208-EL | 8X10/100 Mbps        | 2X100 Mbps   | N/A         | 120W           | 30W         | 2 Gbps             | √           | 170,00    |                                                                                                        |
|   | MS-S0208-GL | Stock 8X10/100 Mbps  | 2X1000 Mbps  | N/A         | 120W           | 30W         | 11.8 Gbps          | √           | 189,00    |                                                                                                        |
|  | MS-S0216-GL | Stock 16X10/100 Mbps | 2X1000 Mbps  | N/A         | 200W           | 30W         | 14.8 Gbps          | √           | 491,00    |                                                                                                        |
|  | MS-S0224-GL | Stock 24X10/100 Mbps | 2X1000 Mbps  | N/A         | 400W           | 30W         | 14.8 Gbps          | √           | 695,00    |                                                                                                        |
|  | MS-S0416-GF | Stock 16X10/100 Mbps | 2X1000 Mbps  | 2X1000 Mbps | 250W           | 30W         | 14.8 Gbps          | N/A         | 779,00    |                                                                                                        |
|  | MS-S0424-GF | Stock 24X10/100 Mbps | 2X1000 Mbps  | 2X1000 Mbps | 400W           | 30W         | 14.8 Gbps          | N/A         | 919,00    |                                                                                                        |

| Accessories                                                                        |          |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |           |
|------------------------------------------------------------------------------------|----------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------|
| Image                                                                              | Model    | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | Listino € |
|    | MS-SDKIT | 1 * T10 Plum screwdriver    1 * H2.0 Hexagon screwdriver<br>1 * T20 Plum screwdriver    1* L-shaped hexagon wrench                                                                                                                                                                                                                                                                                                                                                                          | 10,00     |
|    | A01 (V2) | <b>Pole Mount with Stainless Steel Straps</b><br>* Net Weight: 720g    * Dimension: 170*51.5*152.6mm<br>* Installation Environment: For strapping cameras on poles between 102-127 (4.1-5 inches) in diameter.<br>* Applicable Model: AI Motorized Bullet, AI PTZ Bullet Plus, A41, A43, A62, A63, A71, A72, A77                                                                                                                                                                            | 47,00     |
|    | A02 (V2) | <b>Pole Mount with Stainless Steel Straps</b><br>* Net Weight: 1kg    * Dimension: 180*136*46mm<br>* Installation Environment: For strapping cameras on poles between 102-127 (4.1-5 inches) in diameter.<br>* Applicable Model: AI Motorized Bullet, AI PTZ Bullet Plus, AI Dual-sensor 180° Panoramic Network Camera, TrafficX Camera, TrafficX Enforcement Camera                                                                                                                        | 47,00     |
|    | A03      | <b>External Corner Bracket</b><br>* Net Weight: 900g    * Dimension: 170*152.5*76mm    * Installation Environment: For mounting cameras on an external corner.<br>* Applicable Model: (AI Weather- Proof) Mini Bullet, AI Vandal-proof Mini Bullet, AI Motorized Bullet, AI 180° Panoramic Mini Bullet&Dome, A41, A62, A63, A71, A72, A77, A43                                                                                                                                              | 47,00     |
|    | A41      | <b>Wall Mount</b><br>* Net Weight: 400g    * Dimension: 200*129*100mm    * Installation Environment: For wall or parapet installation.<br>* Applicable Model: Speed Dome                                                                                                                                                                                                                                                                                                                    | 71,00     |
|    | A42      | <b>Pendant Mount</b><br>* Net Weight: 650g    * Dimension: Ø116.5*255mm    * Installation Environment: For ceiling or horizontal structure.<br>* Applicable Model: Speed Dome                                                                                                                                                                                                                                                                                                               | 71,00     |
|    | A42-L    | <b>Extention Lever</b><br>* Net Weight: 325g    * Dimension: Ø57*255mm    * Installation Environment: Used as extentions for Pendant Mount.<br>* Applicable Model: A42, A79, A76 V2                                                                                                                                                                                                                                                                                                         | 47,00     |
|    | A43      | <b>Junction Box</b><br>* Net Weight: 1000g    * Dimension: 195*164*80mm<br>* Installation Environment: For the containing of electrical connections which need to be concealed from sight and deter tampering.<br>* Applicable Model: A01, A41, A42, A03                                                                                                                                                                                                                                    | 95,00     |
|  | A44      | <b>Pole Mount</b><br>* Net Weight: 700g    * Dimension: 135*185*315.5mm<br>* Installation Environment: For wall or parapet installation.<br>* Applicable Model: AI Multi-directional Network Camera                                                                                                                                                                                                                                                                                         | 71,00     |
|                                                                                    |          |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |           |
|  | A62      | <b>Junction Box</b><br>* Net Weight: 510g    * Dimension: 134*126*40mm<br>* Installation Environment: For the containing of electrical connections which need to be concealed from sight and preventing from being tampered<br>* Applicable Model: AI Pro Bullet, (Radar) AI Pro Bullet Plus, (5G AIoT) Pro Bullet Plus, AI PTZ Bullet Plus, AI PTZ Bullet (Only for Wall Mount Version), Supplement Light AI Pro Bullet Plus.<br>* Color optional: White (Default) / Black (Optional: \$5) | 47,00     |
|  | A63      | <b>Junction Box</b><br>* Net Weight: 620g    * Dimension: 134*126*40mm<br>* Installation Environment: For the containing of electrical connections which need to be concealed from sight and deter tampering.<br>* Applicable Model: (AI Weather-proof) Mini Bullet, AI Motorized Mini Bullet<br>* Color optional: White (Default) / Black (Optional)                                                                                                                                       | 47,00     |
|  | A64      | <b>Adapting Plate</b><br>* Net Weight: 55g    * Dimension: 134*127*40mm<br>* Applicable Model: Panoramic Mini Bullet, Vandal-proof Mini Bullet (Only for junction box version)                                                                                                                                                                                                                                                                                                              | 10,00     |
|  | A71      | <b>Wall Mount Bracket</b><br>* Net Weight: 530g    * Dimension: 162*124*78mm    * Installation Environment: Used to install camera on a wall or vertical structure<br>* Applicable Model: AI IR Mini Dome, AI Vandal-proof Mini Dome, AI Weather-proof Mini Dome, AI 3X AF Motorized Dome, AI Motorized Dome, AI 180° Panoramic mini dome<br>* Color optional: White (Default) / Black (Optional)                                                                                           | 47,00     |
|  | A72 (V2) | <b>Wall Mount Bracket</b><br>* Net Weight: 560g    * Dimension: 242*145*133mm    * Installation Environment: For wall or parapet installations<br>* Applicable Model: AI Pro Dome, Fisheye, AI Motorized Dome, AI 180° Mini Panoramic Dome, AI Dual-sensor 180° Panoramic Dome<br>* Color optional: White (Default) / Black (Optional)                                                                                                                                                      | 71,00     |
|  | AC-71    | <b>Smoked Dome Cover</b><br>* Net Weight: 120g    * Dimension: Ø136.8*92.5mm    * Installation Environment: For concealing where a camera is pointed.<br>* Applicable Model: AI PTZ Dome                                                                                                                                                                                                                                                                                                    | 47,00     |
|  | AC-72    | <b>Smoked Dome Cover</b><br>* Net Weight: 39g    * Dimension: Ø100*56mm (4 inch)    * Installation Environment: For concealing where a camera is pointed.<br>* Applicable Model: AI Pro Dome                                                                                                                                                                                                                                                                                                | 24,00     |
|  | A73      | <b>Adapter Plate</b><br>* Net Weight: 28g    * Dimension: 115*122.5*10mm<br>* Installation Environment: For the installation that cable need to be routed through the side outlet<br>* Applicable Model: AI Vandal-proof Mini Dome<br>* Color optional: White (Default) / Black (Optional)                                                                                                                                                                                                  | 10,00     |

| Accessories                                                                        |              |                                                                                                                                                                                                                                                                                                                                                                                                    |           |
|------------------------------------------------------------------------------------|--------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------|
| Image                                                                              | Model        | Description                                                                                                                                                                                                                                                                                                                                                                                        | Listino € |
|    | A74          | <b>Junction Box</b><br>* Net Weight: 60g      * Dimension: 121.5*116.5*37.2mm<br>* Installation Environment: For the containing of electrical connections which need to be concealed from sight and deter tampering.<br>* Applicable Model: AI Vandal-proof Mini Dome      * Color optional: White (Default) / Black (Optional)                                                                    | 24,00     |
|    | A75          | <b>Junction Box</b><br>* Net Weight: 200g      * Dimension: 145*167*33.5mm<br>* Installation Environment: For the containing of electrical connections which need to be concealed from sight and deter tampering.<br>* Applicable Model: AI Pro Dome, AI 360° Panoramic Fisheye<br>* Color optional: White (Default) / Black (Optional)                                                            | 47,00     |
|   | A76(V2)      | <b>Pendant Mount</b><br>* Net Weight: 600g      * Dimension: Ø144*L (L is default as 290mm,also can be extended with A42-L)<br>* Installation Environment: Used to install cameras on a ceiling or horizontal structure.<br>* Applicable Model: AI Pro Dome, AI 360° Panoramic Fisheye,AI 3X AF Motorized Dome, AI Motorized Dome, AI 180° Panoramic mini dome, AI Dual-sensor 180° Panoramic Dome | 85,00     |
|    | A77          | <b>Wall Mount</b><br>* Net Weight: 650g      * Dimension: 262*185*138mm      * Installation Environment: For wall or parapet installation<br>* Applicable Model: PTZ Dome                                                                                                                                                                                                                          | 85,00     |
|    | A78          | <b>Recessed Mount</b><br>* Net Weight: 715g      * Dimension: Ø256*94mm      * Installation Environment: For in- ceiling installation<br>* Applicable Model: AI PTZ Dome, AI Pro Dome                                                                                                                                                                                                              | 95,00     |
|    | A79          | <b>Pendant Mount</b><br>* Net Weight: 850g      * Dimension: Ø185*295mm      * Installation Environment: For ceiling or horizontal structure<br>* Applicable Model: AI PTZ Dome                                                                                                                                                                                                                    | 85,00     |
|    | A81          | <b>Recessed Mount</b><br>* Net Weight: 450g      * Dimension: Ø168.7*91.3mm      * Installation Environment: For in- ceiling installation<br>* Applicable Model: AI Weather-proof Mini Dome (Only for cable out version)                                                                                                                                                                           | 85,00     |
|    | A82          | <b>Recessed Mount</b><br>* Net Weight: 475g      * Dimension: Ø168.7*91.3mm      * Installation Environment: For in- ceiling installation<br>* Applicable Model: AI IR Mini Dome                                                                                                                                                                                                                   | 85,00     |
|  | A83          | <b>Junction Box</b><br>* Net Weight: 270g      * Dimension: Ø122*45.5mm<br>* Installation Environment: For the containing of electrical connections which need to be concealed from sight and deter tampering<br>* Applicable Model: AI Weather-proof Mini Dome                                                                                                                                    | 38,00     |
|  | A84          | <b>Junction Box</b><br>* Net Weight: 361.55g      * Dimension: 145.5*167*47.6mm<br>* Installation Environment: For the containing of electrical connections which need to be concealed from sight and deter tampering.<br>* Applicable Model: AI Motorized Dome                                                                                                                                    | 47,00     |
|  | S45          | <b>Solar Panel Modules</b><br>* Net Weight: 4.2kg      * External Dimension: 580*385*69mm<br>* MaximumPower- Pmax(W) <b>45W</b><br>* Solar Panel + Bracket + Hoop (Without Battery Pack)<br>* Installation Environment: For expanding solar energy receiving area to improve conversion efficiency<br>* Applicable Model: 4G Solar-powered Traffic Sensing Camera                                  | 284,00    |
|  | S90          | <b>Solar Panel</b><br>* Net Weight: 5.25kg      * External Dimension: 585*830*30 mm<br>* Installation Environment:For expanding solar energy receiving area to improve conversion efficiency<br>* MaximumPower-Pmax(W) <b>90W</b><br>* Applicable Model: Solar-powered Series camera                                                                                                               | 330,00    |
|  | B90          | <b>Modular Battery</b><br>* Net Weight: 730g      * External Dimension: 125*48*95 mm<br>* Applicable Model: Solar-powered Series camera<br>* Battery Capacity: <b>90Wh</b>                                                                                                                                                                                                                         | 369,00    |
|  | SPK1S90B36   | <b>Solar Power Modules</b><br>* <b>4*90Wh Modular Battery + Bracket+ Battery box + Solar Panel S90</b><br>* Installation Environment:For expanding solar energy receiving area to improve conversion efficiency<br>* Applicable Model: Solar-powered Series camera<br><br>* Optional: 6*90Wh Modular Battery + Bracket + Battery box+ Solar Panel S90: \$606                                       | 2.190,00  |
|  | SPK1B36      | <b>Solar Power Modules</b><br>* <b>4*90Wh Modular Battery + Bracket + Battery box</b><br>* Installation Environment:For expanding solar energy receiving area to improve conversion efficiency<br>* Applicable Model: Solar-powered Series camera<br><br>* Optional: 6*90Wh Modular Battery + Bracket + Battery box: \$536                                                                         | 1.829,00  |
|  | ZM90M10-24S1 | <b>Solar Power Modules</b><br>* <b>Bracket*2 + Solar Panel S90*1</b><br>* Installation Environment:For expanding solar energy receiving area to improve conversion efficiency<br>* Applicable Model: Solar-powered Series camera<br><br>* Optional: Bracket*2 + Solar Panel S90*2: \$168                                                                                                           | 469,00    |
|  | SA02         | <b>Wall Mount</b><br>* Applicable Model: Solar-powered Series camera                                                                                                                                                                                                                                                                                                                               | 119,00    |

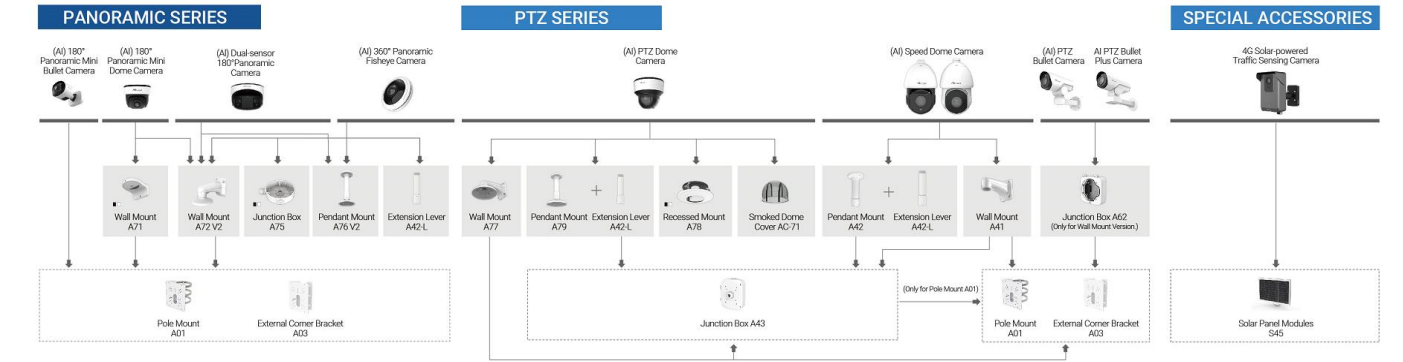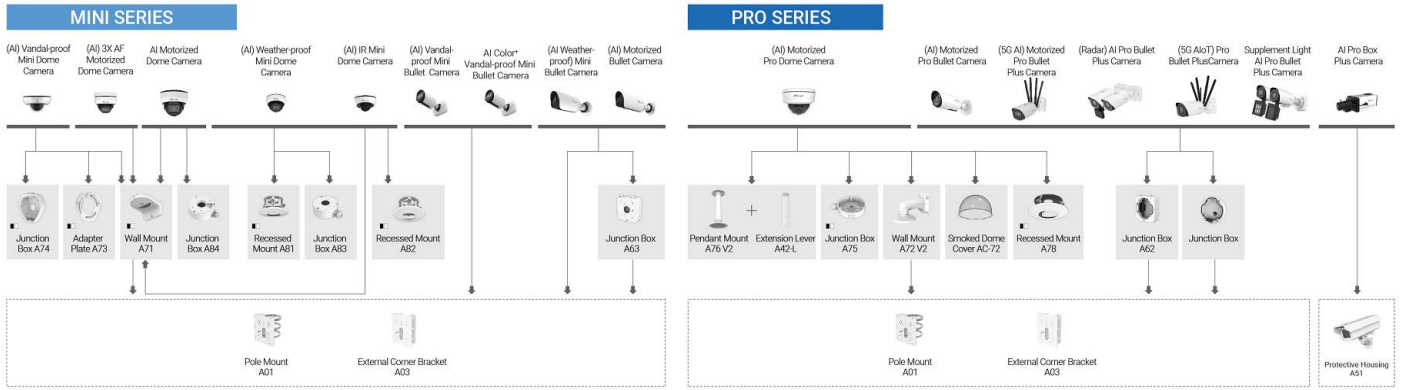

## Naming Convention

### Video Surveillance Camera

( Model ): MS-C2966-R(T)F(I)PC --- AI Motorized Pro Bullet Plus Camera

| MS-C             | 2                | 9                                      | 66                                      | - | R F I P E         |
|------------------|------------------|----------------------------------------|-----------------------------------------|---|-------------------|
| Milesight Camera | Resolution       | Sensor                                 | Camera Type                             |   | Advanced Features |
| 2 - 2MP          | 1 - 4K           | 21 - 4x5MP AI Multi-directional Camera | T - High Frame Rate (90fps/100fps)      |   |                   |
| 4 - 4MP          | 2 - 4K (1/1.8")  | 41 - Speed Dome Camera                 | R - High Frame Rate (60fps)             |   |                   |
| 5 - 5MP          | 3 - 5MP          | 52 - Pro Box Plus Camera               | S - 20fps@ 4K Series                    |   |                   |
| 6-6MP            | 4 - 4MP (1/1.8") | 67 - PTZ Bullet Plus Camera            | X - Magnification of the lens           |   |                   |
| 8 - 4K/8MP       | 5 - 4MP(1/2.8")  | 66 - Pro Bullet Plus Camera            | e.g.: X42 - 42X AF lens                 |   |                   |
| 9 - 12MP         | 6 - 12MP         | 65 - 180° Panoramic Mini Bullet Camera | F - Motorized Vari-focal Lens           |   |                   |
|                  | 7-6MP(1/2.4")    | 64 - Vandal-proof Mini Bullet Camera   | I - P-Iris Supported                    |   |                   |
|                  | 8 - 2MP (1/2")   | 63 - Weather-proof Mini Bullet Camera  | U - Full-color Supported                |   |                   |
|                  | 9 - 2MP          | 62 - Pro Bullet Camera                 | G - 5G Supported                        |   |                   |
|                  |                  | 61 - PTZ Bullet Camera                 | O - IoT Supported                       |   |                   |
|                  |                  | 77 - Dual-sensor 180° Panoramic Camera | P - PoE Supported                       |   |                   |
|                  |                  | 76 - 180° Panoramic Mini Dome Camera   | K -Open Platform                        |   |                   |
|                  |                  | 75 - Weather-proof Mini Dome Camera    | GX - Platform Upgrade                   |   |                   |
|                  |                  | 74 - Fisheye Camera                    | e.g.:G1 represents the first generation |   |                   |
|                  |                  | 73 - Vandal-proof Mini Dome Camera     | G2 represents the second generation     |   |                   |
|                  |                  | 72 - Pro Dome Camera                   | A/C/D/E- AI Platform                    |   |                   |
|                  |                  | 71 - PTZ Dome Camera                   |                                         |   |                   |
|                  |                  | 83 - IR Mini Dome Camera               |                                         |   |                   |

| Solar-powered Series |             |                    |            |               |                                                                                                                         |      |
|----------------------|-------------|--------------------|------------|---------------|-------------------------------------------------------------------------------------------------------------------------|------|
| SP                   | 11          | 1                  | 4          | 1             | LTE-NA                                                                                                                  | 4mm  |
| Milesight Camera     | Camera Type | Hardware Version   | Resolution | Sensor        | Cellular Module                                                                                                         | Lens |
| Solar Power          | 11- Bullet  | 1-First Generation | 4-4MP      | 1-4MP(1/2.8") | LTE-NA -North America<br>LTE-EU -Europe, the Middle East and Africa<br>LTE-AU -Latin America, Australia and New Zealand |      |

| 4G Solar-powered Traffice Sensing Camera |                             |                    |                                               |                                                                                                             |  |  |
|------------------------------------------|-----------------------------|--------------------|-----------------------------------------------|-------------------------------------------------------------------------------------------------------------|--|--|
| ( Model ): SC211-NA                      |                             |                    |                                               |                                                                                                             |  |  |
| SC                                       | 2                           | 1                  | 1-                                            | NA                                                                                                          |  |  |
| Series                                   | Major Application Scenarios | Core Technology    | Carnera Type                                  | 4G Module Supported Region                                                                                  |  |  |
| Sensing Camera                           | 2 - Intelligent Traffic     | 1 - Frame-based AI | (2_)1-4G Solar-powered Traffic Sensing Camera | NA -North America<br>EU -Europe, the Middle East and Africa<br>AU -Latin America, Australia and New Zealand |  |  |

| Network Video Recorder                                                                                    |   |                                                                                      |        |         |                             |  |
|-----------------------------------------------------------------------------------------------------------|---|--------------------------------------------------------------------------------------|--------|---------|-----------------------------|--|
| ( Model ): MS-N7032-UPH --- 32-channel 4K H.265 PoE NVR                                                   |   |                                                                                      |        |         |                             |  |
| MS-N                                                                                                      | 7 | 032 -                                                                                | U      | P       | H                           |  |
| 1 - 2 * HDD (2.5")<br>or 1 * HDD (3.5")<br>5 - 2 * HDD (3.5")<br>7 - 4 * HDD (3.5")<br>8 - 8 * HDD (3.5") |   | 004 - 4-CH<br>008 - 8-CH<br>016 - 16-CH<br>032 - 32-CH<br>048 - 48-CH<br>064 - 64-CH | U - 4K | P - PoE | C/E/H/G - H.265 Compression |  |

| Enterprise NVR                                                          |                                                                                                                                                      |                                                                    |   |                                                        |  |  |
|-------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------|---|--------------------------------------------------------|--|--|
| ( Model ):VE0602-A --- Enterprise NVR with 32-CH License, 6 Disk Slots. |                                                                                                                                                      |                                                                    |   |                                                        |  |  |
| VE                                                                      | 12                                                                                                                                                   | 08                                                                 | - | S                                                      |  |  |
| Enterprise NVR                                                          | Disk Slot                                                                                                                                            | Camera License                                                     |   | Server Chassis                                         |  |  |
|                                                                         | 01-1*(2.5" or 3.5")Slots<br>02-2*(2.5" or 3.5")Slots<br>04-16*(2.5"or 3.5")Slots<br>06-6*(2.5" or 3.5")Slots<br>12-12*3.5" Slots<br>16-16*3.5" Slots | 00 - 8-CH<br>01 - 16-CH<br>02 - 32-CH<br>04 - 64-CH<br>08 - 128-CH |   | A - Enterprise NVR<br>S -Enterprise NVR Storage Server |  |  |

| PoE Switch                                     |    |                                                                                        |                                                        |                                                 |  |  |
|------------------------------------------------|----|----------------------------------------------------------------------------------------|--------------------------------------------------------|-------------------------------------------------|--|--|
| ( Model ): MS-S0224-GL --- 24-port PoE Switch  |    |                                                                                        |                                                        |                                                 |  |  |
| MS-S                                           | 02 | 24 -                                                                                   | G                                                      | L                                               |  |  |
| 02 - 2 * Uplink Ports<br>04 - 4 * Uplink Ports |    | 04 - 4 * PoE Ports<br>08 - 8 * PoE Ports<br>16 - 16 * PoE Ports<br>24 - 24 * PoE Ports | E - 10/100 Mbps Uplink Port<br>G - Gigabit Uplink Port | F - Optical Fiber Port (SFP)<br>L - Extend Mode |  |  |

| IP Speaker          |   |                   |                  |  |  |  |
|---------------------|---|-------------------|------------------|--|--|--|
| ( Model ): MS-WS15P |   |                   |                  |  |  |  |
| MS-W                | S | 15                | P                |  |  |  |
| IP Speaker          |   | Rate Power        |                  |  |  |  |
|                     |   | 15-15W<br>30 -30W | P -POE Supported |  |  |  |

| CCTV Router                         |                       |                            |                                 |          |                             |  |
|-------------------------------------|-----------------------|----------------------------|---------------------------------|----------|-----------------------------|--|
| ( Model ): UR32 - L04EU-G-P-W-RS485 |                       |                            |                                 |          |                             |  |
| UR32                                | L                     | 04                         | EU                              | G-P-W    | - RS485                     |  |
| Model Name                          | Cellular Network Type | Modem Manufacturer & Model | Operating Region                | Function |                             |  |
| UR32S                               | L: 4G LTE             |                            | EU: EMEA/Pacific Asia (5G)      | G: GPS   | (For UR32 Only)             |  |
| UR32                                | 5: 5G                 |                            | AU: South America and Australia | P: PoE   | Add RS-485 Seriel Interface |  |
| UR35                                |                       |                            | AF: North America FirstNet      | W: Wi-Fi |                             |  |
| UR75                                |                       |                            | AE: Asia/Europe/Australia       |          |                             |  |
| UF31                                |                       |                            | GL: Global                      |          |                             |  |
| UF51                                |                       |                            |                                 |          |                             |  |