






4K/H.265⁺ Solution

4G Solar-powered Security Camera Kit										
Picture	Model	Series	Resolution	Lens	Solar Power Modules			IP&IK Rating	Listino €	Features
					Bracket	Battery box B36	Solar Panel S90			
	SP111 S90B36 PN: 41/LTE-NA (1/2.8")	Smart Event	4MP 2688*1520 @15fps	Fixed Lens 2.8mm/6mm	✓	4*90Wh Battery	✓	IP67	€ 5.350,00	* SP111 with Solar Power Modules SPK1S90B36 * All-in-One Wireless Solution * Battery: Achieve up to 9 days of extended standby time * Intelligent Energy-saving Operation Mode: Performance Mode/Sleep Mode/Eco Mode * Advanced AI algorithms enable precise detection and alerting of abnormal situations * Effortless Modular Installation * Capable of withstanding up to level 12 winds
	SP111 S90B36 PN: 41L/LTE-NA (1/2.8")	ANPR	4MP 2688*1520 @15fps	Fixed Lens 16mm	✓	4*90Wh Battery	✓	IP67	€ 7.683,00	* SP111 with Solar Power Modules SPK1B36 * All-in-One Wireless Solution * Battery: Achieve up to 9 days of extended standby time * Intelligent Energy-saving Operation Mode: Performance Mode/Sleep Mode/Eco Mode * Advanced AI algorithms enable precise detection and alerting of abnormal situations * Effortless Modular Installation * Capable of withstanding up to level 12 winds
	SP111 B36 PN: 41/LTE-NA (1/2.8")	Smart Event	4MP 2688*1520 @15fps	Fixed Lens 2.8mm/6mm	✓	4*90Wh Battery	N/A	IP67	€ 4.869,00	* SP111 with Solar Power Modules SPK1B36 * All-in-One Wireless Solution * Battery: Achieve up to 9 days of extended standby time * Intelligent Energy-saving Operation Mode: Performance Mode/Sleep Mode/Eco Mode * Advanced AI algorithms enable precise detection and alerting of abnormal situations * Effortless Modular Installation * Capable of withstanding up to level 12 winds
	SP111 B36 PN: 41L/LTE-NA (1/2.8")	ANPR	4MP 2688*1520 @15fps	Fixed Lens 16mm	✓	4*90Wh Battery	N/A	IP67	€ 5.670,00	* SP111 with Solar Power Modules SPK1B36 * All-in-One Wireless Solution * Battery: Achieve up to 9 days of extended standby time * Intelligent Energy-saving Operation Mode: Performance Mode/Sleep Mode/Eco Mode * Advanced AI algorithms enable precise detection and alerting of abnormal situations * Effortless Modular Installation * Capable of withstanding up to level 12 winds



AI Color+ Vandal-proof Mini Bullet Network Camera										
Picture	Model	Resolution	Lens	Field of View	Ultra Low-light	WDR	Illumination Distance	IP&IK Rating	Listino €	Features
 	 MS-C2964-UPD	2MP 1920*1080 @30fps	Fixed Lens 2.8mm	H109° D125° V61°	Color: 0.001Lux @F1.0	120dB	30m	IP67 IK10	€ 345,00	* Full-color Image Performance * F1.0 Super Aperture * Support PoE; SD card, up to 1TB; 3-Axis Design * Support H.265 + /H.265/H.264 + /H.264 * Video Content Analysis * Crossing Line People Counting
	 	5MP 2592*1944 @30fps	Fixed Lens 2.8mm	H104° D129° V78°	Color: 0.002Lux @F1.0	120dB	30m	IP67 IK10	€ 416,00	
	 MS-C8164-UPD	8MP(4K) 3840*2160 @30fps	Fixed Lens 2.8mm	H108° D125° V60°	Color: 0.005Lux @F1.0	120dB	30m	IP67 IK10	€ 499,00	



AI IR Mini Dome Network Camera										
Picture	Model	Resolution	Lens	Field of View	Ultra Low-light	WDR	IR Distance	IP&IK Rating	Listino €	Features
 	 MS-CQ4431-HYPG1/2.8/M	4MP 2688*1520 @30fps	Fixed Lens 2.8mm	H112° D137° V61,5°	0.0008 Lux@F1.0 (Color, 30IRE)	120dB Super WDR	Up to 40m (IR Light) Up to 30m (White Light)	IP67 IK10	564,00	* Support PoE; SD card, up to 1TB; 3-Axis Design * Support H.265 + /H.265/H.264 + /H.264; * Alarm I/O 1/1 - Audio I/O 1/1 Built-in Microphone - Built-in Speaker Red and Blue Flashing Lights: 1 x Red Light and 1 x Blue Light ** NO - Alarm I/O 1/1 - Audio I/O 1/1
	 MS-CQ4431-HYPG1/4/M	4MP 2688*1520 @30fps	Fixed Lens 4mm	H93° D111,5° V49,5°	0.0008 Lux@F1.0 (Color, 30IRE)	120dB Super WDR	Up to 40m (IR Light) Up to 30m (White Light)	IP67 IK10	546,00	
	 MS-CQ5431-HYPG1/2.8 **	5MP 2592*1944 @30fps	Fixed Lens 2.8mm	H112° D137° V61,5°	0.003 lux@F1.0 (Color, 30IRE)	120dB Super WDR	Up to 40m (IR Light) Up to 30m (White Light)	IP67 IK10	462,00	
 	 MS-CQ4468-HYPG1/2.8/M	4MP 2688*1520 @30fps	Fixed Lens 2.8mm	H112° D137° V61,5°	0.0008 Lux@F1.0 (Color, 30IRE)	120dB Super WDR	Up to 40m (IR Light) Up to 30m (White Light)	IP67 IK10	580,00	
	 MS-CQ4468-HYPG1/4/M	4MP 2688*1520 @30fps	Fixed Lens 4mm	H93° D111,5° V49,5°	0.0008 Lux@F1.0 (Color, 30IRE)	120dB Super WDR	Up to 40m (IR Light) Up to 30m (White Light)	IP67 IK10	580,00	
	 MS-CQ5468-HYPG1/2.8 **	5MP 2592*1944 @30fps	Fixed Lens 2.8mm	H112° D137° V61,5°	0.003 lux@F1.0 (Color, 30IRE)	120dB Super WDR	Up to 40m (IR Light) Up to 30m (White Light)	IP67 IK10	483,00	

AI Mini Series

AI IR Mini Dome Network Camera										
Picture	Model	Resolution	Lens	Field of View	Ultra Low-light	WDR	IR Distance	IP&IK Rating	Listino €	Features
 	 MS-C2983-PD	2MP 1920*1080 @30fps	Fixed Lens 2.8mm	H111° D128° V61°	Color: 0.005Lux @F1.6	120dB	20m	N/A	269,00	* Support PoE; Built-in Microphone; SD card, up to 1TB; 3-Axis Design * Support H.265 + /H.265/H.264 + /H.264; * Video Content Analysis * Crossing Line People Counting Optional: * Lens 4mm/6mm, Black Housing * No Built-in Microphone
	 	4MP 2688*1520 @30fps	Fixed Lens 2.8mm	H106° D124° V58°	Color: 0.005Lux @F1.6	120dB	20m	N/A	316,00	
	  	5MP 2592*1944 @30fps	Fixed Lens 2.8mm	H105° D131° V78°	Color: 0.008Lux @F1.6	120dB	20m	N/A	340,00	
	 MS-C8183-PD	8MP(4K) 3840*2160 @30fps	Fixed Lens 2.8mm	H110° D126° V60°	Color: 0.012Lux @F1.6	120dB	20m	N/A	425,00	
AI Vandal-proof Mini Dome Network Camera										
Picture	Model	Resolution	Lens	Field of View	Ultra Low-light	WDR	IR Distance	IP&IK Rating	Listino €	Features
 	 MS-C2973-PD	2MP 1920*1080 @30fps	Fixed Lens 2.8mm	H111° D128° V61°	Color: 0.005Lux @F1.6	120dB	30m	IP67 IK10	279,00	* Support PoE; Built-in Microphone; SD card, up to 1TB; 3-Axis Design * Support H.265 + /H.265/H.264 + /H.264; * Video Content Analysis * Crossing Line People Counting Optional: * Lens 4mm/6mm, Black Housing * No Built-in Microphone
	 MS-C4573-PD	4MP 2688*1520 @30fps	Fixed Lens 2.8mm	H106° D124° V58°	Color: 0.005Lux @F1.6	120dB	30m	IP67 IK10	326,00	
	 MS-C5373-PD	5MP 2592*1944 @30fps	Fixed Lens 2.8mm	H105° D131° V78°	Color: 0.008Lux @F1.6	120dB	30m	IP67 IK10	354,00	

AI Vandal-proof Mini Bullet Network Camera										
Picture	Model	Resolution	Lens	Field of View	Ultra Low-light	WDR	IR Distance	IP&IK Rating	Listino €	Features
 Stock	 MS-C2964-PD	2MP 1920*1080 @30fps	Fixed Lens 2.8mm	H111° D128° V61°	Color: 0.005Lux @F1.6	120dB	30m	IP67 IK10	279,00	* Support PoE; SD card, up to 1TB; 3-Axis Design * Support H.265 + /H.265/H.264 + /H.264 * Video Content Analysis * Crossing Line People Counting
	 MS-C4564-PD	4MP 2688*1520 @30fps	Fixed Lens 2.8mm	H106° D124° V58°	Color: 0.005Lux @F1.6	120dB	30m	IP67 IK10	326,00	
	 MS-C5364-PD-JB MS-C5364-PD-JB/N	5MP 2592*1944 @30fps	Fixed Lens 2.8mm	H105° D131° V78°	Color: 0.008Lux @F1.6	120dB	30m	IP67 IK10	378,00	
	 MS-C8164-PD-JB	8MP(4K) 3840*2160 @30fps	Fixed Lens 2.8mm	H110° D126° V60°	Color: 0.012Lux @F1.6	120dB	30m	IP67 IK10	458,00	
AI Weather-proof Mini Dome Network Camera										
Picture	Model	Resolution	Lens	Field of View	Ultra Low-light	WDR	IR Distance	IP&IK Rating	Listino €	Features
  Stock	 MS-C2975-PD	2MP 1920*1080 @30fps	Fixed Lens 2.8mm	H111° D128° V61°	Color: 0.005Lux @F1.6	120dB	25m	IP67 IK10	293,00	* Support PoE; Built-in Microphone; SD card, up to 1TB; 3-Axis Design * Support H.265 + /H.265/H.264 + /H.264; * Video Content Analysis * Crossing Line People Counting Optional: * Lens 4mm/6mm, Black Housing * No Built-in Microphone
	 MS-C4575-PD	4MP 2688x1520 @30fps	Fixed Lens 2.8mm	H106° D124° V58°	Color: 0.005Lux @F1.6	120dB	25m	IP67 IK10	335,00	
	 MS-C5375-PD-JB MS-C5375-PD-JB/N	5MP 2592*1944 @30fps	Fixed Lens 2.8mm	H105° D131° V78°	Color: 0.008Lux @F1.6	120dB	25m	IP67 IK10	411,00	
	 MS-C8175-PD-JB	8MP(4K) 3840*2160 @30fps	Fixed Lens 2.8mm	H110° D126° V60°	Color: 0.012Lux @F1.6	120dB	25m	IP67 IK10	482,00	
AI Weather-proof Mini Bullet Network Camera										
Picture	Model	Resolution	Lens	Field of View	Ultra Low-light	WDR	IR Distance	IP&IK Rating	Listino €	Features
  Stock	  MS-C2963-RPE	2MP 1920*1080 @60fps	Fixed Lens 4mm	H91° D106° V50°	Color: 0.005Lux @F1.6	140dB	50m	IP67 IK10	416,00	* Support PoE; SD card, up to 1TB; 3-Axis Design * Support H.265 + /H.265/H.264 + /H.264 * Video Content Analysis, Object Counting (Crossing Line People/Vehicle, Regional People), Heat Map,Face Detection Optional: * Lens 2.8mm/6mm * Black Housing
	 MS-C5363-PE MS-C5363-PE/4 MS-C5363-PE/4/N	5MP 2592*1944 @30fps	Fixed Lens 2,8mm 4mm 4mm	H86° D108° V63°	Color: 0.008Lux @F1.6	120dB	50m	IP67 IK10	439,00 491,00	
	 MS-C8163-PE	8MP(4K) 3840*2160 @30fps	Fixed Lens 4mm	H91° D106° V50°	Color: 0.012Lux @F1.6	120dB	50m	IP67 IK10	477,00	
AI Motorized Dome Network Camera										
Picture	Model	Resolution	Lens	Field of View	Ultra Low-light	WDR	IR Distance	IP&IK Rating	Listino €	Features
  Stock	 MS-C2975-RFPD	2MP 1920*1080 @60fps	Motorized lens 2.7~13.5mm	H111°~H34° D130°~D39° V60°~V19°	Color: 0.005Lux @F1.4	120dB	50m	IP67 IK10	491,00	* Support PoE; Built-in Microphone; SD card, up to 1TB; 3-Axis Design * Support H.265 + /H.265/H.264 + /H.264; * Video Content Analysis * Crossing Line People Counting Optional: * Black Housing * No Built-in Microphone * Junction Box A84
	 MS-C4575-FPD	4MP 2688*1520 @30fps	Motorized lens 2.7~13.5mm	H97°~H28° D110°~D32° V55°~V16°	Color: 0.005Lux @F1.4	120dB	50m	IP67 IK10	505,00	
	 MS-C5375-FPD MS-C5375-FPD/N	5MP 2592*1944 @30fps	Motorized lens 2.7~13.5mm	H99°~H31° D124°~D38° V72°~V23°	Color: 0.008Lux @F1.4	120dB	50m	IP67 IK10	510,00	
	 MS-C8175-FPD	8MP(4K) 3840*2160 @30fps	Motorized lens 2.7~13.5mm	H107°~H33° D125°~D37° V58°~V18°	Color: 0.012Lux @F1.4	120dB	50m	IP67 IK10	605,00	
AI Motorized Bullet Network Camera										
Picture	Model	Resolution	Lens	Field of View	Ultra Low-light	WDR	IR Distance	IP&IK Rating	Partner	Features
  Stock	  MS-C2964-RFPE	2MP 1920*1080 @60fps	Motorized lens 2.7~13.5mm	H111°~H34° D130°~D39° V60°~V19°	Color: 0.005Lux @F1.4	140dB	50m	IP67 IK10	510,00	* Support PoE; SD card, up to 1TB; 3-Axis Design * Support H.265 + /H.265/H.264 + /H.264 * Video Content Analysis, Object Counting (Crossing Line People/Vehicle, Regional People), Heat Map,Face Detection Optional: * Black Housing
	 MS-C5364-FPE	5MP 2592*1944 @30fps	Motorized lens 2.7~13.5mm	H99°~H31° D124°~D38° V72°~V23°	Color: 0.008Lux @F1.4	120dB	50m	IP67 IK10	548,00	
	 MS-C8164-FPE	8MP(4K) 3840*2160 @30fps	Motorized lens 2.7~13.5mm	H107°~H33° D125°~D37° V58°~V18°	Color: 0.012Lux @F1.4	120dB	50m	IP67 IK10	614,00	





AI Pro Series

AI Motorized Pro Dome Network Camera										
Picture	Model	Resolution	Lens	Field of View	Ultra Low-light	WDR	IR Distance	IP&IK Rating	Listino €	Features
 	  MS-C2972-RFPE (1/2.8")	2MP 1920*1080 @60fps	Motorized lens 2.7~13.5mm	H115°~H34° D135°~D39° V62°~V19°	Color: 0.005Lux @F1.4	140dB	50m	IP67 IK10	629,00	* Support PoE; SD card, up to 1TB; 3-Axis Design * Support H.265 + /H.265/H.264 + /H.264 * Support Multi-Interface Cable Versions * Integrated Cable Management * Multi port: Built-in Mic, Alarm I/O, Audio out, Ethernet Port(PoE), DC 12V * Video Content Analysis, Object Counting (Crossing Line People/Vehicle, Regional People) ,Heat Map,Face Detection Optional: * Black Housing , Smoked Dome Cover AC-72 * No Built-in Microphone
	  MS-C4472-RFPE (1/1.8")	4MP 2688*1520 @60fps	Motorized lens 3.6~10mm	H96°~H42° D111°~D48° V55°~V23°	Color: 0.002Lux @F1.4	140dB	50m	IP67 IK10	884,00	
	 MS-C5372-FPE (1/2.8")	5MP 2592*1944 @30fps	Motorized lens 2.7~13.5mm	H89°~H30° D111°~D37° V66°~V22°	Color: 0.008Lux @F1.4	120dB	50m	IP67 IK10	662,00	
	 MS-C6772-FPE (1/2.4")	6MP 3200*1800 @30fps	Motorized lens 2.7~13.5mm	H112°~H38° D129°~D44° V61°~V22°	Color: 0.005Lux @F1.6	120dB	50m	IP67 IK10	695,00	
	 MS-C8172-FPE (1/2.8")	8MP(4K) 3840*2160 @30fps	Motorized lens 2.7~13.5mm	H96°~H33° D112°~D37° V53°~V18°	Color: 0.012Lux @F1.4	120dB	50m	IP67 IK10	713,00	
	 MS-C8272-FPE (1/1.8")	8MP(4K) 3840*2160 @30fps	Motorized lens 3.6~10mm	H110°~H46° D126°~D54° V61°~V25°	Color: 0.009Lux @F1.4	120dB	50m	IP67 IK10	874,00	
AI Motorized Pro Bullet Network Camera										
Picture	Model	Resolution	Lens	Field of View	Ultra Low-light	WDR	IR Distance	IP&IK Rating	Listino €	Features
 	  MS-C2962-RFPE (1/2.8")	2MP 1920*1080 @60fps	Motorized lens 2.7~13.5mm	H92°~H32° D107°~D37° V51°~V18°	Color: 0.005Lux @F1.4	140dB	60m	IP67	633,00	* Support PoE; SD card, up to 1TB; 3-Axis Design * Support H.265 + /H.265/H.264 + /H.264 * Integrated Cable Management * Multi Port: Alarm I/O, Audio I/O, DC 12V * Video Content Analysis, Object Counting (Crossing Line People/Vehicle, Regional People) ,Heat Map,Face Detection Optional: * Junction Box A62 * Black Housing: € 49,00
	 MS-C5362-FPE (1/2.8")	5MP 2592*1944 @30fps	Motorized lens 2.7~13.5mm	H89°~H30° D111°~D37° V66°~V22°	Color: 0.008Lux @F1.4	120dB	60m	IP67	670,00	
	 MS-C6762-FPE (1/2.4")	6MP 3200*1800 @30fps	Motorized lens 2.7~13.5mm	H112°~H38° D129°~D44° V61°~V22°	Color: 0.005Lux @F1.6	120dB	60m	IP67	700,00	
	 MS-C8162-FPE (1/2.8")	8MP(4K) 3840*2160 @30fps	Motorized lens 2.7~13.5mm	H96°~H33° D112°~D37° V53°~V18°	Color: 0.012Lux @F1.4	120dB	60m	IP67	719,00	
AI Motorized Pro Bullet Plus Network Camera										
Picture	Model	Resolution	Lens	Field of View	Ultra Low-light	WDR	IR Distance	IP&IK Rating	Listino €	Features
 	  MS-C4466-RFPE (1/1.8")	4MP 2688*1520 @60fps	Motorized lens 3.6~10mm	H100°~H45° D116°~D51° V57°~V25°	Color: 0.002Lux @F1.4	140dB	65m	IP67 IK10	893,00	* Support PoE; SD card, up to 1TB; 3-Axis Design; 4KV Surge Protection, * Support H.265 + /H.265/H.264 + /H.264 * Integrated Cable Management * Multi Port: Alarm I/O, Audio I/O, Ethernet Port(PoE), DC 12V * Video Content Analysis, Object Counting(People&Vehicle), Heat Map,Face Detection
	 MS-C5366-FPE	5MP 2592*1944 @30fps	Motorized lens 2.7~13.5mm	H113°~H33° D138°~D42° V83°~V25°	Color: 0.008Lux @F1.4	120dB	65m	IP67 IK10	725,00	
	 MS-C6766-FPE (1/2.4")	6MP 3200*1800 @30fps	Motorized lens 2.7~13.5mm	H112°~H38° D129°~D44 V61°~V22°	Color: 0.005Lux @F1.6	120dB	65m	IP67 IK10	747,00	
	 MS-C6766-FPE/N Nera	6MP 3200*1800 @30fps	Motorized lens 2.7~13.5mm	H112°~H38° D129°~D44 V61°~V22°	Color: 0.005Lux @F1.6	120dB	65m	IP67 IK10	799,00	
	 MS-C8166-FPE (1/2.8")	8MP(4K) 3840*2160 @30fps	Motorized lens 2.7~13.5mm	H110°~H33° D128°~D38° V60°~V18°	Color: 0.012Lux @F1.4	120dB	65m	IP67 IK10	765,00	
	 MS-C8166-FPE/N Nera	8MP(4K) 3840*2160 @30fps	Motorized lens 2.7~13.5mm	H110°~H33° D128°~D38° V60°~V18°	Color: 0.012Lux @F1.4	120dB	65m	IP67 IK10	813,00	
AI 4X/12X Pro Bullet Plus Network Camera										
Picture	Model	Resolution	Lens	Field of View	Ultra Low-light	WDR	IR Distance	IP&IK Rating	Listino €	Features
 	  MS-C2966-X12RPE (1/2.8")	2MP 1920*1080 @60fps	12X AF Lens 5.3~64mm	H61°~H5° D69°~D5° V36°~V2°	Color: 0.005Lux @F1.6	140dB	180m	IP67 IK10	775,00	* Support PoE; SD card, up to 1TB; 3-Axis Design; 4KV Surge Protection, * Support H.265 + /H.265/H.264 + /H.264 * Integrated Cable Management * Multi Port: Alarm I/O, Audio I/O, Ethernet Port(PoE), DC 12V * Video Content Analysis, Object Counting (Crossing Line People/Vehicle, Regional People), Heat Map,Face Detection
	  MS-C4466-X4RPE (1/1.8")	4MP 2688x1520 @60fps	4X AF Lens 8~32mm	H44°~H13° D51°~D15° V25°~V7°	Color: 0.002Lux @F1.6	140dB	180m	IP67 IK10	1.040,00	
	 MS-C5366-X12PE (1/2.8")	5MP 2592*1944 @30fps	12X AF Lens 5.3~64mm	H57°~H4° D69°~D5° V44°~V1°	Color: 0.008Lux @F1.6	120dB	180m	IP67 IK10	809,00	
	 MS-C8266-X4PE (1/1.8")	8MP(4K) 3840*2160 @30fps	4X AF Lens 8~32mm	H44°~H13° D51°~D15° V25°~V7°	Color: 0.009Lux @F1.6	120dB	180m	IP67 IK10	809,00	

AI Panoramic Series

AI 180° Panoramic Mini Dome Network Camera										
Picture	Model	Resolution	Lens	Field of View	Ultra Low-light	WDR	IR Distance	IP&IK Rating	Listino €	Features
	 MS-CS376-PE	5MP 2592*1944 @30fps	Fixed Lens 1.68mm	H180° V95°	Color: 0.008Lux @F2.0	120dB	15m	IP67 IK10	581,00	* Support PoE; Built-in Microphone; SD card, up to 1TB * Support H.265 + /H.265/H.264 + /H.264 * Integrated Junction Box * Video Content Analysis, Object Counting (Crossing Line People/Vehicle, Regional People), Heat Map
	 MS-C8176-PE	8MP(4K) 3840*2160 @25fps	Fixed Lens 1.68mm	H180° V86°	Color: 0.012Lux @F2.0	120dB	15m	IP67 IK10	619,00	Optional: * Black Housing * No Built-in Microphone
AI 180° Panoramic Mini Bullet Network Camera										
Picture	Model	Resolution	Lens	Field of View	Ultra Low-light	WDR	IR Distance	IP&IK Rating	Listino €	Features
	 MS-CS365-PE	5MP 2592*1944 @30fps	Fixed Lens 1.68mm	H180° V95°	Color: 0.008Lux @F2.0	120dB	15m	IP67 IK10	595,00	* Support PoE; Built-in Microphone; SD card, up to 1TB * Support H.265 + /H.265/H.264 + /H.264 * Integrated Junction Box * Video Content Analysis, Object Counting (Crossing Line People/Vehicle, Regional People), Heat Map
	 MS-C8165-PE	8MP(4K) 3840*2160 @25fps	Fixed Lens 1.68mm	H180° V86°	Color: 0.012Lux @F2.0	120dB	15m	IP67 IK10	633,00	Optional: * Black Housing * No Built-in Microphone
AI 360° Panoramic Fisheye Network Camera										
Picture	Model	Imaging Device	Lens	Field of View	Ultra Low-light	WDR	IR Distance	IP&IK Rating	Listino €	Features
	 MS-C8274-PA (1/1.8")	1/1.8" 4K CMOS	Fixed Lens 1.5mm	Ceiling: 360° Wall: 180° Flat: 360°	Color: 0.008Lux @F1.8	120dB	15m	IP67 IK10	893,00	* Support PoE; Built-in Microphone; SD card, up to 256G * Support H.265 + /H.265/H.264 + /H.264 * Support Built-in Mic * Video Content Analysis, People Counting, Heat Map, People Flow Analysis
	 MS-C9674-PA (1/1.7")	1/1.7" 12MP CMOS	Fixed Lens 1.98mm	Ceiling: 360° Wall: 180° Flat: 360°	Color: 0.05Lux @F2.8	120dB	15m	IP67 IK10	1.356,00	* Support PoE; Built-in Microphone; SD card, up to 256G * Support H.265 + /H.265/H.264 + /H.264 * Multi Port: Built-in Mic, Alarm I/O, Audio I/O, Ethernet Port(PoE), DC 12V * Video Content Analysis, People Counting, Heat Map, People Flow Analysis
AI Dual-sensor 180° Panoramic Network Camera										
Picture	Model	Resolution	Lens	Field of View	Ultra Low-light	WDR	IR Distance	IP&IK Rating	Listino €	Features
	 MS-C8477-PC	8MP 5084*1520 @25fps	Fixed Lens 4mm	H180° V50°	Color: 0.002Lux @F1.6	140dB	30m	IP67 IK10	959,00	* Support PoE; Built-in Microphone; SD card, up to 1TB * Support H.265 + /H.265(HEVC)/H.264 + /H.264 * Intrusion Detection, Motion Detection,Heat Map
	 MS-C8477-HPG1	8MP 5084*1520 @25fps	Fixed Lens 4mm	H180° V58°	Color: 0.0005Lux @F1	140dB	30m	IP67 IK10	1.099,00	* Support PoE; Built-in Microphone; SD card, up to 1TB * Support H.265 + /H.265(HEVC)/H.264 + /H.264 * Intrusion Detection, Motion Detection,Heat Map
										
4x5MP AI Multi-directional Network Camera										
Picture	Model	Resolution	Lens	Field of View	Ultra Low-light	WDR	IR Distance	IP&IK Rating	Listino €	Features
	 MS-CS321-FPE	20MP(4*5MP) 2592*1944 @30fps	Motorized lens 3.2~8.1mm	H87° ~ H40° D109°~D49° V64° ~ V30°	0.005Lux @F1.6	120dB	30m	IP66 IK10	2.900,00	* COMS 1/2.8" * Four lenses each support configuring VCA function: Intrusion Detection, Region Entrance, Region Exiting, Advanced Motion Detection, Tamper Detection, line Crossing, Loitering, Objec Left, Object Removed * Support target classification:Human, Motor Vehicle(Car, Motorcycle, Bus, Truck), Non-moto Vehide (Scooter) * Support PoE; SD card; up to 2*1TB * Support Scooter Detection, Every Angle with Flexible Positioning * Built-in 360° IR LED,Integrated Interface Management,Convenientand Simplified, Configuration(Support WIFI connection) Optional: * Pole Mount A44 * Pendant Mount A79 Compatibile solamente con sistemi VMS (No NVR)

AI 12X PTZ Bullet Network Camera										
Picture	Model	Resolution	Lens	Field of View	Ultra Low-light	WDR	IR Distance	IP&IK Rating	Listino €	Features
 	StarlightSuper WDR MS-C2961-X12RPE (1/2.8")	2MP 1920*1080 @60fps	12X AF Lens 5.3~64mm	H61°~H5° D69°~D5° V36°~V2°	Color: 0.005Lux @F1.6	140dB	140m	IP66	973,00	* Support PoE; SD card, up to 1TB; IR LEDs & White LEDs; * Support H.265 + /H.265/H.264 + /H.264; * 12X Optical Zoom, PTZ Position Display, 3D positioning, * 300 Preset Points, 8 Patrols, up to 48 presets each patrol; 4 Patterns * 360° Pan Range; Pan Manual Speed: 0.1°~50°/s, Preset Speed: 50°/s * -45°~30° / Tilt Manual Speed: 0.1°~25°/s, Tilt Preset Speed: 25°/s * DC + PoE + Alarm (Default), DC + PoE + Audio (Optional) * Wall Mount Bracket (Default), Pedestal Mount Bracket (Optional) * AI Based Video Content Analysis, Object Counting (Crossing Line People/Vehicle, Regional People), Face Detection
	Starlight MS-C5361-X12PE (1/2.8") Optional: * Junction Box A62	5MP 2592*1944 @30fps	12X AF Lens 5.3~64mm	H57°~H4° D69°~D5° V44°~V1°	Color: 0.008Lux @F1.6	120dB	140m	IP66	1.021,00	
AI 12X/20X/23X PTZ Bullet Plus Network Camera										
Picture	Model	Resolution	Lens	Field of View	Ultra Low-light	WDR	IR Distance	IP&IK Rating	Listino €	Features
 	StarlightSuper WDR MS-C4467-X20RPE (1/1.8")	4MP 2688*1520 @60fps	20X AF Lens 6.4~128mm	H60°~H3° D67°~D4° V37°~V1°	Color: 0.002Lux @F1.6	140dB	180m	IP66	1.739,00	* Support PoE; SD card, up to 1TB; * Support H.265 + /H.265/H.264 + /H.264; * New-generation PTZ Motor; * 12X/20X/23X Optical Zoom; PTZ Position Display, 3D positioning, * 300 Preset Points, 8 Patrols, up to 48 presets each patrol; 4 Patterns * 360° Pan Range; Pan Manual Speed: 0.1°~60°/s, Preset Speed: 60°/s * -45°~30° / Tilt Manual Speed: 0.1°~30°/s, Tilt Preset Speed: 30°/s * Multi port: Alarm I/O, Audio I/O, Ethernet Port(PoE), DC 12V * AI Based Video Content Analysis, Object Counting (Crossing Line People/Vehicle, Regional People), Face Detection, Vehicle Counting.
	Starlight MS-C5367-X12PE (1/2.8") Optional: * Junction Box A62	5MP 2592*1944 @30fps	12X AF Lens 5.3~64mm	H57°~H4° D69°~D5° V44°~V1°	Color: 0.008Lux @F1.6	120dB	180m	IP66	1.266,00	
	Starlight MS-C5367-X23PE (1/2.8")	5MP 2592*1944 @30fps	23X AF Lens 5~117mm	H55°~H3° D68°~D4° V42°~V2°	Color: 0.008Lux @F1.5	120dB	180m	IP66	1.314,00	
	4K MS-C8267-X20PE (1/1.8")	8MP(4K) 3840*2160 @30fps	20X AF Lens 6.4~128mm	H60°~H3° D67°~D4° V37°~V1°	Color: 0.009Lux @F1.6	120dB	180m	IP66	2.126,00	

AI 12X/20X/23X PTZ Dome Network Camera										
Picture	Model	Resolution	Lens	Field of View	Ultra Low-light	WDR	IR Distance	IP&IK Rating	Listino €	Features
 	  MS-C2971-X12RPE (1/2.8")	2MP 1920*1080 @60fps	12X AF Lens 5.3~64mm	H61°~H5° D69°~D5° V36°~V2°	Color: 0.005Lux @F1.6	140dB	160m	IP66 IK10	1.243,00	* Support PoE; SD card, up to 1TB, 4KV Surge Protection * Support H.265 + /H.265/H.264 + /H.264 * 12X/20X/23X optical zoom, PTZ Position Display, 3D positioning, * 300 Preset Points, 8 Patrols, up to 48 presets each patrol; 4 Patterns * 360° endless Pan, Pan Manual Speed: 0.1°~350°/s, Preset Speed: 350°/s * -5°~90° Tilt, Tilt Manual Speed: 0.1°~360°/s, Preset Speed: 360°/s * Multi Port: Alarm I/O, Audio I/O, DC 12V * AI Based Video Content Analysis, Object Counting (Crossing Line People/Vehicle, Regional People), Face Detection
	  MS-C2971-X23RPE (1/2.8")	2MP 1920*1080 @60fps	23X AF Lens 5~117mm	H60°~H3° D69°~D4° V35°~V2°	Color: 0.005Lux @F1.5	140dB	160m	IP66 IK10	1.314,00	
	  MS-C5371-X12PE (1/2.8")	5MP 2592*1944 @30fps	12X AF Lens 5.3~64mm	H57°~H4° D69°~D5° V44°~V1°	Color: 0.008Lux @F1.6	120dB	160m	IP66 IK10	1.290,00	
AI 25X/30X/36X/42X Speed Dome Network Camera										
Picture	Model	Resolution	Lens	Field of View	Ultra Low-light	WDR	IR Distance	IP&IK Rating	Listino €	Features
 	 MS-C4441-X36RPE (1/1.8")	4MP 2688*1520 @60fps	36X AF Lens 5~205.3mm	H62°~H3° D70°~D3° V37°~V1°	Color: 0.008Lux @F1.55	120dB	300m	IP66 (IK10)	3.048,00	* Support PoE; SD card, up to 1TB, 6KV Surge Protection, Heater * Support H.265 + /H.265/H.264 + /H.264 * 25X/30X/36X/42X Optical Zoom; PTZ Position Display, 3D positioning, * 300 Preset Points, 8 Patrols, up to 48 presets each patrol; 4 Patterns * 360°endless / Pan Manual Speed: 0.1°~250°/s, Pan Preset Speed: 250°/s * -5°~90°(Auto Flip) / Tilt Manual Speed: 0.1°~160°/s, Tilt Preset Speed: 160°/s * Multi port: RS485, Alarm I/O*4/2, Audio I/O, AC 24V * Video Content Analysis, Object Counting (Crossing Line People/Vehicle, Regional People), Face Detection, Vehicle Counting * Wall Mount Bracket A41 (Default)
	  MS-C5341-X25PE (1/2.8")	5MP 2592*1944 @30fps	25X AF Lens 4.8~120mm	H57°~H2.8° D69.8°~D3.6° V43.8°~V1.8°	Color: 0.008Lux @F1.5	120dB	200m	IP66 (IK10)	1.555,00	
	  MS-C5341-X30PE (1/2.8")	5MP 2592*1944 @30fps	30X AF Lens 4.7~141mm	H58°~H3° D71°~D3° V44°~V2°	Color: 0.008Lux @F1.5	120dB	200m	IP66 (IK10)	2.055,00	
	  MS-C5341-X42PE (1/2.8")	5MP 2592*1944 @30fps	42X AF Lens 7~300mm	H43°~H2° D53°~D2° V33°~V1°	Color: 0.008Lux @F1.8	120dB	300m	IP66 (IK10)	4.361,00	
	 MS-C8241-X36PE (1/1.8")	8MP(4K) 3840*2160 @30fps	36X AF Lens 5.7~205.2mm	H66°~H3° D72°~D3° V41°~V1°	Color: 0.009Lux @F1.55	120dB	300m	IP66 (IK10)	3.270,00	
AI 30X/36X/42X Wiper Speed Dome Network Camera										
Picture	Model	Resolution	Lens	Field of View	Ultra Low-light	WDR	IR Distance	IP&IK Rating	Listino €	Features
 	  MS-C4441-X36RPE /W (1/1.8")	4MP 2688*1520 @60fps	36X AF Lens 5~205.3mm	H62°~H3° D70°~D3° V37°~V1°	Color: 0.008Lux @F1.55	120dB	300m	IP66	3.577,00	* Smart Rain-sensing Wiper * Support PoE; SD card, up to 1TB, 6KV Surge Protection, Heater * Support H.265 + /H.265/H.264 + /H.264 * 30X/36X/42X Optical Zoom; PTZ Position Display, 3D positioning, 300 Preset Points, 8 Patrols, up to 48 presets each patrol; 4 Patterns * 360°endless / Pan Manual Speed: 0.1°~250°/s, Pan Preset Speed: 250°/s * -5°~90°(Auto Flip) / Tilt Manual Speed: 0.1°~160°/s, Tilt Preset Speed: 160°/s * Multi port: RS485, Alarm I/O *4/2, Audio I/O, AC 24V * Video Content Analysis, Object Counting (Crossing Line People/Vehicle, Regional People), Face Detection, Vehicle Counting * Wall Mount Bracket A41 (Default)
	 MS-C5341-X30PE /W (1/2.8")	5MP 2592*1944 @30fps	30X AF Lens 4.7~141mm	H58°~H3° D71°~D3° V44°~V2°	Color: 0.008Lux @F1.5	120dB	300m	IP66	2.796,00	
	 MS-C5341-X42PE /W (1/2.8")	5MP 2592*1944 @30fps	42X AF Lens 7~300mm	H43°~H2° D53°~D2° V33°~V1°	Color: 0.008Lux @F1.8	120dB	300m	IP66	4.990,00	
	 MS-C8241-X36PE /W (1/1.8")	8MP(4K) 3840*2160 @30fps	36X AF Lens 5.7~205.2mm	H66°~H3° D72°~D3° V41°~V1°	Color: 0.009Lux @F1.55	120dB	300m	IP66	3.811,00	

5G AIoT Series

AIoT 12X Pro Bullet Plus Network Camera										
Picture	Model	Resolution	Lens	Field of View	Ultra Low-light	WDR	IR Distance	IP&IK Rating	Listino €	Features
	StarlightSuper Wide MS-C2966-X12ROPC-915M (1/2.8")	2MP 1920*1080 @60fps	12X AF Lens 5.3~64mm	H61°~H5° D69°~D5° V36°~V2°	Color: 0.005Lux @F1.6	140dB	180m	IP67	989,00	* Built-in LoRaWAN® Gateway * Support Connection with more than 2000 LoRaWAN® Sensors / Nodes from 8 End-Devices Simultaneously * High Capacity, High Compatibility, Embedded Network Server * Supprt IoT, PoE, SD card, up to 256G; 3-Axis Design * Support H.265 + /H.265/H.264 + /H.264 * Integrated Cable Management * Multi port: Alarm I/O, Audio I/O, DC 12V * Video Content Analysis, People Counting, Face Detection, Heat Map * IP67 Only for Camera Body
5G AI Motorized Pro Bullet Plus Network Camera										
Picture	Model	Resolution	Lens	Field of View	Ultra Low-light	WDR	IR Distance	IP&IK Rating	Listino €	Features
	StarlightSuper Wide MS-C2966-RFGPE (1/2.8")	2MP 1920*1080 @60fps	Motorized Lens 2.7~13.5mm	H113°~H33° D130°~D38° V60°~V18°	Color: 0.005Lux @F1.4	140dB	65m	IP67	1.852,00	* Supprt 5G/4G/3G,P2P, Nano SIM * Support PoE, SD card, up to 1TB; 3-Axis Design * Support H.265 + /H.265/H.264 + /H.264 * Integrated Cable Management * Multi port: Alarm I/O, Audio I/O, DC 12V * Video Content Analysis, Object Counting (Crossing Line People/Vehicle, Regional People), Face Detection, Heat Map * IP67 Only for Camera Body
	4K MS-C8266-FGPE (1/2.8")	8MP(4K) 3840x2160 @30fps	Motorized Lens 3.6~10mm	H116°~H48° D134°~D55° V65°~V27°	Color: 0.009Lux @F1.4	120dB	65m	IP67	2.065,00	* Supprt 5G/4G/3G,P2P, Nano SIM * Support PoE, SD card, up to 1TB; 3-Axis Design * Support H.265 + /H.265/H.264 + /H.264 * Integrated Cable Management * Multi port: Alarm I/O, Audio I/O, DC 12V * Video Content Analysis, Object Counting (Crossing Line People/Vehicle, Regional People), Face Detection, Heat Map * IP67 Only for Camera Body
5G AI 4X/12X Pro Bullet Plus Network Camera										
Picture	Model	Resolution	Lens	Field of View	Ultra Low-light	WDR	IR Distance	IP&IK Rating	Listino €	Features
	StarlightSuper Wide MS-C2966-X12RGPE (1/2.8")	2MP 1920*1080 @60fps	12X AF Lens 5.3~64mm	H61°~H5° D69°~D5° V36°~V2°	Color: 0.005Lux @F1.6	140dB	180m	IP67	1.999,00	* Supprt 5G/4G/3G,P2P, Nano SIM * Support PoE, SD card, up to 1TB; 3-Axis Design * Support H.265 + /H.265/H.264 + /H.264 * Integrated Cable Management * Multi port: Alarm I/O, Audio I/O, DC 12V * Video Content Analysis, Object Counting (Crossing Line People/Vehicle, Regional People), Face Detection, Heat Map * IP67 Only for Camera Body
	4K MS-C5366-FGPC (1/1.8")	5MP 2592*1944 @30fps	Motorized Lens 2.7~13.5mm	H44°~H13° D51°~D15° V25°~V7°	Color: 0.009Lux @F1.6	120dB	65m	IP67	1.923,00	* Supprt 5G/4G/3G,P2P, Nano SIM * Support PoE, SD card, up to 1TB; 3-Axis Design * Support H.265 + /H.265/H.264 + /H.264 * Integrated Cable Management * Multi port: Alarm I/O, Audio I/O, DC 12V * Video Content Analysis, Object Counting (Crossing Line People/Vehicle, Regional People), Face Detection, Heat Map * IP67 Only for Camera Body
5G AIoT 4X/12X Pro Bullet Plus Network Camera										
Picture	Model	Resolution	Lens	Field of View	Ultra Low-light	WDR	IR Distance	IP&IK Rating	Listino €	Features
	StarlightSuper Wide MS-C2966-X12RGOPC-915M (1/2.8")	2MP 1920*1080 @60fps	12X AF Lens 5.3~64mm	H61°~H5° D69°~D5° V36°~V2°	Color: 0.005Lux @F1.6	140dB	180m	IP67	2.269,00	* Built-in LoRaWAN® Gateway * Support Connection with more than 2000 LoRaWAN® Sensors / Nodes from 8 End-Devices Simultaneously * High Capacity, High Compatibility, Embedded Network Server * Supprt IoT, 5G/4G/3G, P2P, Nano SIM * Support PoE, SD card, up to 256G; 3-Axis Design * Support H.265 + /H.265/H.264 + /H.264 * Integrated Cable Management * Multi port: Alarm I/O, Audio I/O, DC 12V * Video Content Analysis, People Counting, Face Detection, Heat Map * IP67 Only for Camera Body

* "-915M" / "-868M" / "-470M" under the model refers to different LoRaWAN Frequency in option for different countries / regions, (e.g.)
* "-915M": KR920 / AS923 / AU915 / US915-4.28dBi ; "-868M": IN865 / EU868 / RU864-4.52dBi; "-470M": CN470-0.87dBi

TELECAMERE LETTURA TARGHE										
Immagine	Modello	Ottica	Field of View	Ultra Low-light	WDR	ANPR Distance (Day)	ANPR Distance (Night with Illumination)	IR Distance	Listino €	Caratteristiche
	Stock MS-C2964-RFLPE	Motorized lens 2.7~13.5mm 2MP 1920*1080 @60fps	H111°~H34° D130°~D39° V60°~V19°	Color: 0.005Lux @F1.4	140dB	25m	20m	Up to 50m	1.389,00 €	* Support SD card, up to 256G; 3-Axis Design * Multi Port: Alarm I/O*1+Audio I/O*1+DC 12V+PoE * IP&IK Rating: IP67 - IK10
	MIL-MS-A63	STAFFA DA PARETE BULLET MINI							47,00 €	
	Stock TS2966-X12TPE	12X AF Lens 5.3~64mm 1920*1080 @90fps	H61°~H5° D69°~D5° V36°~V2°	Color: 0.005Lux @F1.6	140dB	70m	35m	Up to 180m	1.975,00 €	* Support SD card, up to 256G; 3-Axis Design * Multi-Port: RS485+Alarm I/O*1+Audio I/O*1+DC 12V +PoE * Integrated Cable Management (Default) * IP&IK Rating: IP67 - IK10
	Stock MS-C2866-X4TLPA	4X AF Lens 8~32mm 1920*1080 @90fps	H44°~H13° D51°~D15° V25°~V7°	Color: 0.002Lux@F1.6 B/W: 0Lux with IR on	120Db	60m	30m	Up to 180m	1.914,00 €	

PoE NVR Series

4K H.265 + Mini PoE NVR 1000 Series										
Picture	Model	Bandwidth	Synchronous playback	PoE Ports	HDD Support	Local display		Alarm I/O	Listino €	Features
						HDMI	VGA			
 	 MS-N1004-UPC	In:40Mbps Out:40Mbps	1*8MP 1*5MP 4*1080P 4*720P	4	1*10TB (3.5"HDD)	✓	N/A	N/A	383,00	1*RJ45 10/100Mbps 2*USB2.0 Interfaces 220mm(W)×200mm(D)×43.6mm(H) AI based Video Content Analysis, ANR, PoS Intergration, Auto Backup
	  Stock	In:80Mbps Out:80Mbps	1*8MP 1*5MP 4*1080P 8*720P	4	1*10TB (3.5"HDD)	✓	N/A	N/A	383,00	
 	 MS-N1008-UNPC	In:80Mbps Out:80Mbps	1*8MP 1*5MP 4*1080P 8*720P	4	1*10TB (3.5"HDD)	✓	N/A	N/A	510,00	1*RJ45 100/1000Mbps 2*USB2.0 Interfaces 115mm(W)X115mm(D)X180mm(H) AI based Video Content Analysis, ANR, PoS Intergration, Auto Backup

4K H.265 + PoE NVR 5000 Series (NDAA)										
Picture	Model	Bandwidth	Synchronous playback	PoE Ports	HDD Support	Local display		Alarm I/O	Listino €	Features
						HDMI	VGA			
 	  Stock	In:80Mbps Out:50Mbps	1*8MP 2*5MP 6*1080P 8*720P	8	2*10TB (3.5"HDD)	✓	✓	4/1	695,00	1*RJ45 100/1000Mbps 2*USB 2.0 Interfaces 1*RCA Audio Input + 1*RCA Audio Output AI Based Video Content Analysis, Face Detection, ANR, PoS Intergration, ANPR Management, Auto Backup
 	  Stock	In:160Mbps Out:160Mbps	3*8MP 4*5MP 12*1080P 16*720P	16	2*10TB (3.5"HDD)	✓	✓	4/1	988,00	

4K H.265 + PoE NVR 7000 Series										
Picture	Model	Bandwidth	Synchronous playback	PoE Ports	HDD Support	Local display		Alarm I/O	Listino €	Features
						HDMI	VGA			
 	  Stock	In:160Mbps Out:160Mbps	6*8MP 8*6MP 12*4MP 16*1080P	16	4*10TB (3.5"HDD)	✓	✓	16/4	1.611,00	1*RJ45 100/1000Mbps 1*RCA Audio Input + 1*RCA Audio Output 1*RS-485 Series Port for PTZ 1*RS-232 Series Port for Console 1*RS-485 Series Port for Keyboard 1*USB 3.0 Interfaces + 2*USB 2.0 Interfaces * N+1 Hot Spare RAID 0/1/5/6/10 Storage AI based Video Content Analysis,Face Detection, ANR, PoS Intergration, ANPR Management, Auto Backup
	 MS-N7032-UPH	In:256Mbps Out:256Mbps	4*8MP 6*5MP 16*1080P 32*720P	24	4*10TB (3.5"HDD)	✓	✓	16/4	1.611,00	
	 MS-N7048-UPH	In:320Mbps Out:256Mbps	4*8MP 6*5MP 16*1080P 32*720P	24	4*10TB (3.5"HDD)	✓	✓	16/4	1.966,00	

NVR Series

4K H.265 + Mini NVR 1000 Series										
Picture	Model	Bandwidth	Synchronous playback	RAID	HDD Support	Local display		Audio Alarm	Listino €	Features
						HDMI	VGA			
 	MS-N1004-UC	In:40Mbps Out:40Mbps	1*8MP 1*5MP 4*1080P 4*720P	N/A	1*10TB (3.5"HDD)	✓	N/A	N/A	289,00	1*RJ45 10/100Mbps 2*USB 2.0 Interfaces 1*SATA HDD(3.5") support 220mm(W)×220mm(D)×143.6mm(H) AI based Video Content Analysis, ANR, PoS Intergration, Auto Backup
	 Stock	In:80Mbps Out:80Mbps	1*8MP 1*5MP 4*1080P 8*720P	N/A	1*10TB (3.5"HDD)	✓	N/A	N/A	289,00	
 	 Stock	In:80Mbps Out:80Mbps	1*8MP 1*5MP 4*1080P 8*720P	N/A	2*2TB (2.5"HDD)	✓	N/A	N/A	359,00	1*RJ45 100/1000Mbps 2*USB 2.0 Interfaces 80mm(W)X80mm(D)X120mm(H) AI based Video Content Analysis, ANR, PoS Intergration, Auto Backup Optional: Black/Gold/Silver Color 2*2.5"HDD Support:

4K H.265 + Pro NVR 5000 Series (NDAA)										
Picture	Model	Bandwidth	Synchronous playback	RAID	HDD Support			Alarm I/O	Listino €	Features
						HDMI	VGA			
 <i>Stock</i>	<i>MS-N5008-NE</i>	In:160Mbps Out:160Mbps	3*8MP 4*5MP 8*1080P 8*720P	N/A	2*10TB (3.5"HDD)	✓	✓	4/1	506,00	1*RJ45 100/1000Mbps 2*USB 2.0 Interfaces 1*RCA Audio Input + 1*RCA Audio Output AI Based Video Content Analysis, Face Detection, ANR, PoS Intergration, ANPR Management, Auto Backup
 <i>Stock</i>	<i>MS-N5016-NE</i>	In:160Mbps Out:160Mbps	3*8MP 4*5MP 12*1080P 16*720P	N/A	2*10TB (3.5"HDD)	✓	✓	4/1	569,00	
4K H.265 + Pro NVR 7000 Series										
Picture	Model	Bandwidth	Synchronous playback	RAID	HDD Support			Alarm I/O	Listino €	Features
 <i>Stock</i>	<i>MS-N7016-G</i>	In:160Mbps Out:160Mbps	6*8MP 9*5MP 16*1080P 16*720P	0/1/5/6/10	4*10TB (3.5"HDD)	✓	✓	16/4	1.271,00	2*RJ45 100/1000Mbps 1*RCA Audio Input + 1*RCA Audio Output 1*RS-485 Series Port for PTZ 1*RS-232 Series Port for Console 1*RS-485 Series Port for Keyboard 1*USB 3.0 Interfaces + 2*USB 2.0 Interfaces AI based Video Content Analysis, Face Detection, ANR, PoS Intergration, ANPR Management, N+1 Hot Space, Auto Backup
	<i>MS-N7032-G</i>	In:256Mbps Out:256Mbps	6*8MP 9*5MP 24*1080P 32*720P	0/1/5/6/10	4*10TB (3.5"HDD)	✓	✓	16/4	1.499,00	
4K H.265 + Pro NVR 8000 Series										
Picture	Model	Bandwidth	Synchronous playback	RAID	HDD Support			Alarm I/O	Listino €	Features
 <i>Stock</i>	<i>MS-N8032-G</i>	In:256Mbps Out:256Mbps	6*8MP 9*5MP 24*1080P 32*720P	0/1/5/6/10	8*10TB (3.5"HDD)	2*HDMI	2*VGA	16/4	1.701,00	2*RJ45 100/1000Mbps 1*RCA Audio Input + 2*RCA Audio Output 1*eSATA Interface 1*RS-485 Series Port for PTZ 1*RS-232 Series Port for Console 1*RS-485 Series Port for Keyboard 1*USB 3.0 Interfaces + 2*USB 2.0 Interfaces AI based Video Content Analysis, Face Detection, ANR, PoS Intergration, ANPR Management, N+1 Hot Space, Auto Backup
	<i>MS-N8064-G</i>	In:320Mbps Out:256Mbps	6*8MP 9*5MP 24*1080P 48*720P	0/1/5/6/10	8*10TB (3.5"HDD)	2*HDMI	2*VGA	16/4	2.290,00	
Enterprise NVR 1U Series(NDAA)										
Picture	Model	Description			Included Camera Access License			Listino €	Features	
 <i>Stock</i>	VE0100-A	Enterprise NVR with 8-CH License, 1 Disk Slots.			* Support 8 video streams per server			1.172,00	* Integrate with Milesight network cameras, sensors and 3rd party network cameras * Support expandable disk capacity of 1*20TB or 2*20TB * Pre-loaded with Milesight VMS Server & Client * N+M Failover ensures data security * Windows-based operating system * 2*HDMI Port+1*DP Port(Support independent and synchronous display) * Rear panel: 2*USB 2.0, 2*USB 3.0, 1*USB-C Port * AC 100-240V, 50-60Hz, DC 12V	
	<i>VE0201-A</i>	Enterprise NVR with 16-CH License, 2 Disk Slots.			* Support 16 video streams per server			1.234,00		
Enterprise NVR 2U Series(NDAA)										
Picture	Model	Description			Included Camera Access License			Listino €	Features	
	VE0601-A	Enterprise NVR with 16-CH License, 6 Disk Slots.			* Support 16 video streams per server			1.560,00	* Integrate with Milesight network cameras, sensors and 3rd party network cameras * Support up to 6*20TB storage and expandable storage capacity * Pre-loaded with Milesight VMS Server & Client * Central Management for single and multiple sites * N+M Failover ensures data security * Windows-based operating system * 1*PCI-E4 slot; * 2*SO-DIMM DDR4 2666 Slot (2*4GB /2*8GB Pre-installed) * 1*HDMI Port+1*DP Port(Support independent and synchronous display) * 1*Power Connector(ATX_PWR 24pin) + 1*Power Connector (CPU_PWR 4pin) +1*CPU Fan+1*COM Connector (9pin) +1*Front Panel Connector * 1* HD Audio Connector * Front panel: 2*USB 2.0 +Rear panel: 2*USB 2.0, 2*USB 3.0 * AC 100-240V, 50-60Hz	
	VE0602-A	Enterprise NVR with 32-CH License, 6 Disk Slots.			* Support 32 video streams per server			2.174,00		

Enterprise NVR 3U Series (NDAA)									
Picture	Model	Description	Included Camera Access License	Listino €	Features				
	VE1604-A	Enterprise NVR with 64-CH License, 16 Disk Slots.	* Support 64 video streams per server	9.828,00	* Integrate with Milesight network cameras, sensors and 3rd party network cameras * Support up to 16*20TB storage and expandable storage capacity * Pre-loaded with Milesight VMS Server & Client * Central Management for single and multiple sites * N+M Failover ensures data security * Windows-based operating system				
	VE1608-A	Enterprise NVR with 128-CH License, 16 Disk Slots.	* Support 128 video streams per server	12.191,00	* Support RAID 0, 1, 5, 6, 10, 50,60 * Support 1*2.5Gbps, 2*100Mbps LAN port * 4* DDR4 Slot(2*8GB Pre-installed) * 2*HDMI Port, 1*DP Port(Support independent and synchronous display) * 1* BNC In + 1*BNC Out * Front panel: 2*USB 3.0 + Rear panel: 4*USB 2.0+2*USB 3.2 Gen2 * AC 100-240V, 50-60Hz, redundant power supply				

Keyboard Series

Network Keyboard										
Picture	Model	LCD Screen	Joystick	Control Mode	PTZ Control	NVR Control	RS232	RJ45	Listino €	Featuress
	MS-K01	58x44 (2.8") Blue Screen	4-axis joystick	IP-based	√	r	√	√	1.509,00	Support Milesight NVR + PTZ Camera Support PoE & DC12V, Built-in Web Server Up to 110 Devices Control 1 * RJ45 100/1000Mbps 1 * RS232

PoE Switch Series

PoE Switch											
Picture	Model	Ports			Max. PoE Power		Switching Capacity	Extend Mode	Listino €	Features	
		PoE Ports	Uplink Ports	SFP Ports	Max Capacity	Single Port					
	MS-S0204-EL	Stock	4X10/100 Mbps	2X100 Mbps	N/A	60W	30W	1.6 Gbps	✓	109,00	* PoE Standard: IEEE802.3 af/at * Port Lightning Protection: 4KV 8/20us * Protection Level: IP30
	MS-S0208-GL	Stock	8X10/100 Mbps	2X1000 Mbps	N/A	120W	30W	11.8 Gbps	✓	189,00	
	MS-S0216-GL	Stock	16X10/100 Mbps	2X1000 Mbps	N/A	200W	30W	14.8 Gbps	✓	491,00	
	MS-S0224-GL	Stock	24X10/100 Mbps	2X1000 Mbps	N/A	400W	30W	14.8 Gbps	✓	695,00	
	MS-S0416-GF	Stock	16X10/100 Mbps	2X1000 Mbps	2X1000 Mbps	250W	30W	14.8 Gbps	N/A	779,00	

PoE Switch Full Gigabit													
Picture	Model		Ports		Max. PoE Power		Switching Capacity	Extend Mode	Listino €	Mini Gbic per UPLINK			
		PoE Ports	Uplink Ports	Uplink SFP Ports	Max Capacity	Single Port							
	PLA-GS-2210-8P2S	Stock	8X100/1000 Mbps	N/A	2X1000 Mbps	120W	30W	20 Gbps	N/A	162,00*	PLA-MGB-SX2	Mini Gbic FO Multi 2Km	€ 24,00*
											PLA-MGB-LX	Mini Gbic FO Mono 20Km	€ 24,00*
	PLA-GSW-2620HP	Stock	24X100/1000 Mbps	N/A	2X1000 Mbps	250W	30W	52 Gbps	N/A	293,00*	PLA-MGB-GT	Mini Gbic RJ45 UTP	€ 38,00*

* Il prezzo segue scontistica PLANET Networking & Communication

Ethernet Switch									
Picture	Model	Ports	Ports	SFP Ports		Switching Capacity		Listino €	
			Uplink Ports						
	PLA-GSD-503	Stock 5X100/1000 Mbps	N/A	N/A	Alimentatore Esterno	10 Gbps		26,00*	
	PLA-GSD-803	Stock 8X100/1000 Mbps	N/A	N/A	Alimentatore Esterno	16 Gbps		34,00*	
	PLA-GSD-805	Stock 8X100/1000 Mbps	N/A	N/A	Alimentatore Interno	16 Gbps		57,00*	
	PLA-GSW-1601	Stock 16X100/1000 Mbps	N/A	N/A	Alimentatore Interno	32 Gbps		91,00*	
	PLA-GSW-2401	Stock 24X100/1000 Mbps	N/A	N/A	Alimentatore Interno	48 Gbps		106,00*	



* Il prezzo segue scontistica PLANET Networking & Communication

Media Converter									
Picture	Model							Listino €	Mini Gbic
	PLA-GT-805A	Stock	MEDIA CONVERTER 100/1000BASE-T A 100/1000BASE-X SFP						59,00*
									PLA-MGB-SX2 Mini Gbic FO Multi 2Km € 24,00*
									PLA-MGB-LX Mini Gbic FO Mono 20Km € 24,00*

* Il prezzo segue scontistica PLANET Networking & Communication

Accessories			
Image	Model	Description	Listino €
	MS-SDKIT	1 * T10 Plum screwdriver 1 * H2.0 Hexagon screwdriver 1 * T20 Plum screwdriver 1* L-shaped hexagon wrench	10,00
	A01 (V2)	Pole Mount with Stainless Steel Straps * Net Weight: 720g * Dimension: 170*51.5*152.6mm * Installation Environment: For strapping cameras on poles between 102-127 (4.1-5 inches) in diameter. * Applicable Model: AI Motorized Bullet, AI PTZ Bullet Plus, A41, A43, A62, A63, A71, A72, A77	47,00
	A02 (V2)	Pole Mount with Stainless Steel Straps * Net Weight: 1kg * Dimension: 180*136*46mm * Installation Environment: For strapping cameras on poles between 102-127 (4.1-5 inches) in diameter. * Applicable Model: AI Motorized Bullet, AI PTZ Bullet Plus, AI Dual-sensor 180° Panoramic Network Camera, TrafficX Camera, TrafficX Enforcement Camera	47,00
	A03	External Corner Bracket * Net Weight: 900g * Dimension: 170*152.5*76mm * Installation Environment: For mounting cameras on an external corner. * Applicable Model: (AI Weather-Proof) Mini Bullet, AI Vandal-proof Mini Bullet, AI Motorized Bullet, AI 180° Panoramic Mini Bullet&Dome, A41, A62, A63, A71, A72, A77, A43	47,00
	A41	Wall Mount * Net Weight: 400g * Dimension: 200*129*100mm * Installation Environment: For wall or parapet installation. * Applicable Model: Speed Dome	71,00
	A42	Pendant Mount * Net Weight: 650g * Dimension: Ø116.5*255mm * Installation Environment: For ceiling or horizontal structure. * Applicable Model: Speed Dome	71,00
	A42-L	Extention Lever * Net Weight: 325g * Dimension: Ø57*255mm * Installation Environment: Used as extentions for Pendant Mount. * Applicable Model: A42, A79, A76 V2	47,00
	A43	Junction Box * Net Weight: 1000g * Dimension: 195*164*80mm * Installation Environment: For the containing of electrical connections which need to be concealed from sight and deter tampering. * Applicable Model: A01, A41, A42, A03	95,00
	A44	Pole Mount * Net Weight: 700g * Dimension: 135*185*315.5mm * Installation Environment: For wall or parapet installation. * Applicable Model: AI Multi-directional Network Camera	71,00
	A62	Junction Box * Net Weight: 510g * Dimension: 134*126*40mm * Installation Environment: For the containing of electrical connections which need to be concealed from sight and preventing from being tampered * Applicable Model: AI Pro Bullet, (Radar) AI Pro Bullet Plus, (5G AIoT) Pro Bullet Plus, AI PTZ Bullet Plus, AI PTZ Bullet (Only for Wall Mount Version), Supplement Light AI Pro Bullet Plus. * Color optional: White (Default) / Black (Optional: \$5)	47,00
	A63	Junction Box * Net Weight: 620g * Dimension: 134*126*40mm * Installation Environment: For the containing of electrical connections which need to be concealed from sight and deter tampering. * Applicable Model: (AI Weather-proof) Mini Bullet, AI Motorized Mini Bullet * Color optional: White (Default) / Black (Optional)	47,00
	A64	Adapting Plate * Net Weight: 55g * Dimension: 134*127*40mm * Applicable Model: Panoramic Mini Bullet, Vandal-proof Mini Bullet (Only for junction box version)	10,00
	A71	Wall Mount Bracket * Net Weight: 530g * Dimension: 162*124*78mm * Installation Environment: Used to install camera on a wall or vertical structure * Applicable Model: AI IR Mini Dome, AI Vandal-proof Mini Dome, AI Weather-proof Mini Dome, AI 3X AF Motorized Dome, AI Motorized Dome, AI 180° Panoramic mini dome * Color optional: White (Default) / Black (Optional)	47,00
	A72 (V2)	Wall Mount Bracket * Net Weight: 560g * Dimension: 242*145*133mm * Installation Environment: For wall or parapet installations * Applicable Model: AI Pro Dome, Fisheye, AI Motorized Dome, AI 180° Mini Panoramic Dome, AI Dual-sensor 180° Panoramic Dome * Color optional: White (Default) / Black (Optional)	71,00
	AC-71	Smoked Dome Cover * Net Weight: 120g * Dimension: Ø136.8*92.5mm * Installation Environment: For concealing where a camera is pointed. * Applicable Model: AI PTZ Dome	47,00
	AC-72	Smoked Dome Cover * Net Weight: 39g * Dimension: Ø100*56mm (4 inch) * Installation Environment: For concealing where a camera is pointed. * Applicable Model: AI Pro Dome	24,00
	A73	Adapter Plate * Net Weight: 28g * Dimension: 115*122.5*10mm * Installation Environment: For the installation that cable need to be routed through the side outlet * Applicable Model: AI Vandal-proof Mini Dome * Color optional: White (Default) / Black (Optional)	10,00

Accessories			
Image	Model	Description	Listino €
	A74	Junction Box * Net Weight: 60g * Dimension: 121.5*116.5*37.2mm * Installation Environment: For the containing of electrical connections which need to be concealed from sight and deter tampering. * Applicable Model: AI Vandal-proof Mini Dome * Color optional: White (Default) / Black (Optional)	24,00
	A75	Junction Box * Net Weight: 200g * Dimension: 145*167*33.5mm * Installation Environment: For the containing of electrical connections which need to be concealed from sight and deter tampering. * Applicable Model: AI Pro Dome, AI 360° Panoramic Fisheye * Color optional: White (Default) / Black (Optional)	47,00
	A76(V2)	Pendant Mount * Net Weight: 600g * Dimension: Ø144*L (L is default as 290mm,also can be extended with A42-L) * Installation Environment: Used to install cameras on a ceiling or horizontal structure. * Applicable Model: AI Pro Dome, AI 360° Panoramic Fisheye,AI 3X AF Motorized Dome, AI Motorized Dome, AI 180° Panoramic mini dome, AI Dual-sensor 180° Panoramic Dome	85,00
	A77	Wall Mount * Net Weight: 650g * Dimension: 262*185*138mm * Installation Environment: For wall or parapet installation * Applicable Model: PTZ Dome	85,00
	A78	Recessed Mount * Net Weight: 715g * Dimension: Ø256*94mm * Installation Environment: For in- ceiling installation * Applicable Model: AI PTZ Dome, AI Pro Dome	95,00
	A79	Pendant Mount * Net Weight: 850g * Dimension: Ø185*295mm * Installation Environment: For ceiling or horizontal structure * Applicable Model: AI PTZ Dome	85,00
	A81	Recessed Mount * Net Weight: 450g * Dimension: Ø168.7*91.3mm * Installation Environment: For in- ceiling installation * Applicable Model: AI Weather-proof Mini Dome (Only for cable out version)	85,00
	A82	Recessed Mount * Net Weight: 475g * Dimension: Ø168.7*91.3mm * Installation Environment: For in- ceiling installation * Applicable Model: AI IR Mini Dome	85,00
	A83	Junction Box * Net Weight: 270g * Dimension: Ø122*45.5mm * Installation Environment: For the containing of electrical connections which need to be concealed from sight and deter tampering * Applicable Model: AI Weather-proof Mini Dome	38,00
	A84	Junction Box * Net Weight: 361.55g * Dimension: 145.5*167*47.6mm * Installation Environment: For the containing of electrical connections which need to be concealed from sight and deter tampering. * Applicable Model: AI Motorized Dome	47,00
	S45	Solar Panel Modules * Net Weight: 4.2kg *External Dimension: 580*385*69mm * MaximumPower- Pmax(W) 45W * Solar Panel + Bracket + Hoop (Without Battery Pack) * Installation Environment: For expanding solar energy receiving area to improve conversion efficiency * Applicable Model: 4G Solar-powered Traffic Sensing Camera	284,00
	S90	Solar Panel * Net Weight: 5.25kg *External Dimension: 585*830*30 mm * Installation Environment:For expanding solar energy receiving area to improve conversion efficiency * MaximumPower-Pmax(W) 90W * Applicable Model: Solar-powered Series camera	330,00
	B90	Modular Battery * Net Weight: 730g *External Dimension: 125*48*95 mm * Applicable Model: Solar-powered Series camera * Battery Capacity: 90Wh	369,00
	SPK1S90B36	Solar Power Modules * 4*90Wh Modular Battery + Bracket+ Battery box + Solar Panel S90 * Installation Environment:For expanding solar energy receiving area to improve conversion efficiency * Applicable Model: Solar-powered Series camera * Optional: 6*90Wh Modular Battery + Bracket + Battery box+ Solar Panel S90: \$606	2.190,00
	SPK1B36	Solar Power Modules * 4*90Wh Modular Battery + Bracket + Battery box * Installation Environment:For expanding solar energy receiving area to improve conversion efficiency * Applicable Model: Solar-powered Series camera * Optional: 6*90Wh Modular Battery + Bracket + Battery box: \$536	1.829,00
	ZM90M10-24S1	Solar Power Modules * Bracket*2 + Solar Panel S90*1 * Installation Environment:For expanding solar energy receiving area to improve conversion efficiency * Applicable Model: Solar-powered Series camera * Optional: Bracket*2 + Solar Panel S90*2: \$168	469,00
	SA02	Wall Mount * Applicable Model: Solar-powered Series camera	119,00

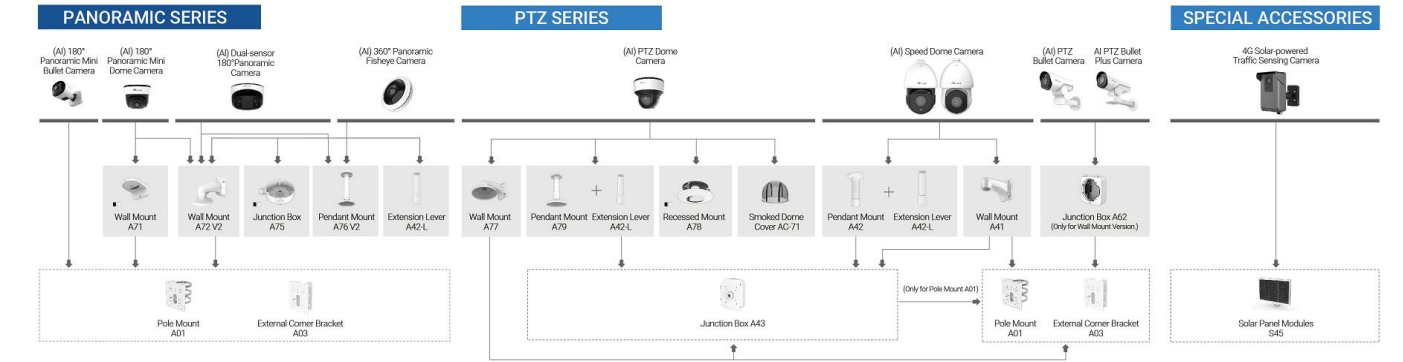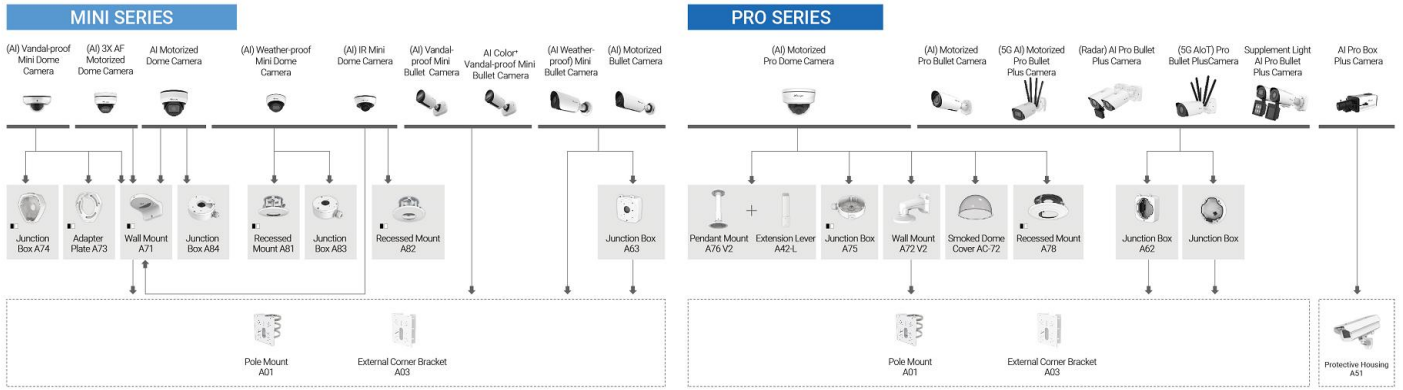

Naming Convention

Video Surveillance Camera

(Model): MS-C2966-R(T)F(I)PC --- AI Motorized Pro Bullet Plus Camera

MS-C	2	9	66	-	R F I P E
Milesight Camera	Resolution	Sensor	Camera Type		Advanced Features
2 - 2MP		1 - 4K	21 - 4x5MP AI Multi-directional Camera		T - High Frame Rate (90fps/100fps)
4 - 4MP		2 - 4K (1/1.8")	41 - Speed Dome Camera		R - High Frame Rate (60fps)
5 - 5MP		3 - 5MP	52 - Pro Box Plus Camera		S - 20fps@ 4K Series
6-6MP		4 - 4MP (1/1.8")	67 - PTZ Bullet Plus Camera		X - Magnification of the lens
8 - 4K/8MP		5 - 4MP(1/2.8")	66 - Pro Bullet Plus Camera		e.g.: X42 - 42X AF lens
9 - 12MP		6 - 12MP	65 - 180° Panoramic Mini Bullet Camera		F - Motorized Vari-focal Lens
		7-6MP(1/2.4")	64 - Vandal-proof Mini Bullet Camera		I - P-Iris Supported
		8 - 2MP (1/2")	63 - Weather-proof Mini Bullet Camera		U - Full-color Supported
		9 - 2MP	62 - Pro Bullet Camera		G - 5G Supported
			61 - PTZ Bullet Camera		O - IoT Supported
			77 - Dual-sensor 180° Panoramic Camera		P - PoE Supported
			76 - 180° Panoramic Mini Dome Camera		K -Open Platform
			75 - Weather-proof Mini Dome Camera		GX - Platform Upgrade
			74 - Fisheye Camera		e.g.:G1 represents the first generation
			73 - Vandal-proof Mini Dome Camera		G2 represents the second generation
			72 - Pro Dome Camera		A/C/D/E- AI Platform
			71 - PTZ Dome Camera		
			83 - IR Mini Dome Camera		

Solar-powered Series						
SP	11	1	4	1	LTE-NA	4mm
Milesight Camera	Camera Type	Hardware Version	Resolution	Sensor	Cellular Module	Lens
Solar Power	11- Bullet	1-First Generation	4-4MP	1-4MP(1/2.8")	LTE-NA -North America LTE-EU -Europe, the Middle East and Africa LTE-AU -Latin America, Australia and New Zealand	

4G Solar-powered Traffice Sensing Camera						
(Model): SC211-NA						
SC	2	1	1-	NA		
Series	Major Application Scenarios	Core Technology	Carnera Type	4G Module Supported Region		
Sensing Camera	2 - Intelligent Traffic	1 - Frame-based AI	(2_)1-4G Solar-powered Traffic Sensing Camera	NA -North America EU -Europe, the Middle East and Africa AU -Latin America, Australia and New Zealand		

Network Video Recorder						
(Model): MS-N7032-UPH --- 32-channel 4K H.265 PoE NVR						
MS-N	7	032 -	U	P	H	
1 - 2 * HDD (2.5") or 1 * HDD (3.5") 5 - 2 * HDD (3.5") 7 - 4 * HDD (3.5") 8 - 8 * HDD (3.5")		004 - 4-CH 008 - 8-CH 016 - 16-CH 032 - 32-CH 048 - 48-CH 064 - 64-CH	U - 4K	P - PoE	C/E/H/G - H.265 Compression	

Enterprise NVR						
(Model):VE0602-A --- Enterprise NVR with 32-CH License, 6 Disk Slots.						
VE	12	08	-	S		
Enterprise NVR	Disk Slot	Camera License		Server Chassis		
	01-1*(2.5" or 3.5")Slots 02-2*(2.5" or 3.5")Slots 04-16*(2.5"or 3.5")Slots 06-6*(2.5" or 3.5")Slots 12-12*3.5" Slots 16-16*3.5" Slots	00 - 8-CH 01 - 16-CH 02 - 32-CH 04 - 64-CH 08 - 128-CH		A - Enterprise NVR S -Enterprise NVR Storage Server		

PoE Switch						
(Model): MS-S0224-GL --- 24-port PoE Switch						
MS-S	02	24 -	G	L		
02 - 2 * Uplink Ports 04 - 4 * Uplink Ports		04 - 4 * PoE Ports 08 - 8 * PoE Ports 16 - 16 * PoE Ports 24 - 24 * PoE Ports	E - 10/100 Mbps Uplink Port G - Gigabit Uplink Port	F - Optical Fiber Port (SFP) L - Extend Mode		

IP Speaker						
(Model): MS-WS15P						
MS-W	S	15	P			
	IP Speaker	Rate Power				
		15-15W 30 -30W	P -POE Supported			

CCTV Router						
(Model): UR32 - L04EU-G-P-W-RS485						
UR32	L	04	EU	G-P-W	- RS485	
Model Name	Cellular Network Type	Modem Manufacturer & Model	Operating Region	Function	(For UR32 Only) Add RS-485 Seriel Interface	
UR32S	L: 4G LTE		EU: EMEA/Pacific Asia (5G)	G: GPS		
UR32	5: 5G		AU: South America and Australia	P: PoE		
UR35			AF: North America FirstNet	W: Wi-Fi		
UR75			AE: Asia/Europe/Australia			
UF31			GL: Global			
UF51						